

#### SELF HELP CHILLED PATISSERIE (REAR DOORS) FITTING INSTRUCTIONS R290 REFRIGERANT




#### General Installation Considerations

- 1) Area in which display is to be sited must have a minimum 2) Install over a sealed floor or ventilated floor void. room floor area no less than 17 sq m (PC6HT), 26 sq m (PC9HT), 28 sq m (PC12HT) or 29 sq m (PC15&18HT). 4) Do not site the display beneath a high level of direct sunlight.


- 5) Display will operate in a 24 hour environment.
- 3) Do not site the display within 2m of ceiling mounted air conditioning grilles. 6) Access to maintain condensing unit should be made via removable
  - fascia panels or doors to customer and operator side of counter.

## FREE-STANDING (FRONTAGE SUPPLIED - PC6HT ONLY)


### A) ROLL UNIT INTO POSITION UNIT SUPPLIED WITH CASTORS



### B) ADJUST UNIT HEIGHT USING SUPPLIED SPANNER (ENSURE THE HALF NUT IS WOUND FULLY UPWARDS)




C) FIT OPTIONAL KICK PLINTH FRONT & REAR LOCATES WITH MAGNETS



NOTE: OPTIONAL KICKPLINTH IS SUITABLE FOR LOWEST ADJUSTED UNIT **HEIGHT** 

# FREE-STANDING OR COUNTER LOCATED: PC6HT ONLY (FASCIA PANEL BY OTHERS)


OPTION1) FASCIA PANEL WITH CUT-OUT FOR CED FASCIA GRILLE(S)

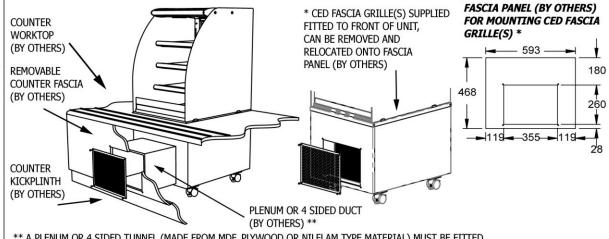

\*\* A PLENUM OR 4 SIDED TUNNEL (MADE FROM MDF, PLYWOOD OR NILFLAM TYPE MATERIAL) MUST BE FITTED BETWEEN THE REAR FACE OF THE CUSTOMER SIDE FASCIA PANEL AND THE FRONT FACE OF THE PATISSERIE, AROUND THE AIR INTAKE CUT-OUT, TO STOP THE RE-CIRCULATION OF HOT AIR FROM THE COMPRESSOR. SILICON SEAL AROUND EDGES TO ENSURE THERE ARE NO AIR GAPS.

# FITTING SHELVES


LOCATE SHELF SUPPORT BRACKETS INTO REAR SLOTS AT HEIGHT & ANGLE TO SUIT PRODUCTS (NOTE: SHORTEST BRACKETS AT TOP AND LONGEST BRACKETS AT BTM) REST GLASS SHELVES ONTO RUBBER BUMPERS ON SHELF SUPPORTS.(NOTE HALF-LENGTH



SHELVES ARE LOCATED ON BOTTOM TO ALLOW FOR TALLER BOTTLES ON DECK)

FREE-STANDING OR **COUNTER LOCATED:** 900/1200/1500/1800 UNITS \*

### OPTION 2) FASCIA PANEL WITH ROUTED SLOTS

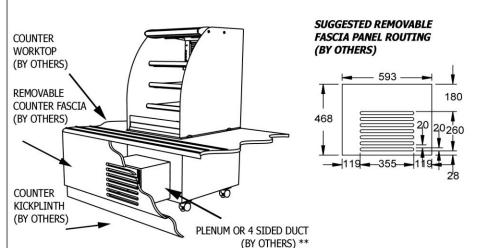

### \* FRONT FASCIA PANEL VENTILATION IS NOT REQUIRED\*

TYPICAL REAR VIEW (OPERATOR SIDE) SHOWING AIR IN/OUT TO REAR ON UNITS LARGER THAN 600

SUGGESTED REMOVABLE



Fax. 01254 238 228 Tel. 01254 238 282 e-mail: aftersales@cedlimited.com