

## GC WASH BASIN electronic tap



### GENERAL SPECIFICATIONS:

Made of food quality stainless steel with chromium content greater than 17.5%.

- Sink 345 x 245 x 120 mm.
- Supplied with trap and fixing strip.
- Soap dispenser (capacity 500 ml), with key.
- Electronic tap with detection cell.
- Splash back 540 or 790 mm high.




### ELECTRONIC TAP:

- Detection cell of hands under tap.
- Non-return valve.
- Automatic limiter 6 l/min built into aerator.
- Automatic stop of flow after 30 seconds (anti-overflow system).
- Recommendation operating pressure: 1 to 5 bar.
- Maximum operating temperature: 75°C.
- Hydraulic supply to hose of 3/8" (12/17) with flat filters.
- Electric supply by 6 volt CRP2 lithium battery built into the body of the tap.
- Battery service life: 125,000 uses per year for 3 years (i.e. 40 uses per hour for 8 hours).
- Battery low or flat indication LED.

### END OF SERVICE LIFE:

- WEEE recycling channel - Syneq.
- Environmental specifications sheet available on request.

Model	reference	net weight
GC wash basin without splash back	<b>806 351</b>	<b>6 kg</b>
GC wash basin with 540 mm splash back	<b>806 352</b>	<b>8.5 kg</b>
GC wash basin with 540 mm splash back + soap dispenser	<b>806 353</b>	<b>8.7 kg</b>
GC wash basin with 790 mm splash back + soap and paper dispenser	<b>806 355</b>	<b>9,9 kg</b>
GC wash basin with 790 mm splash back + soap and paper dispenser + bin	<b>806 390</b>	<b>12.5 kg</b>

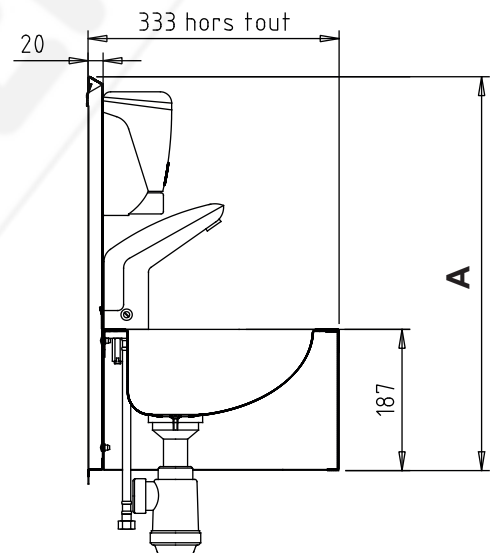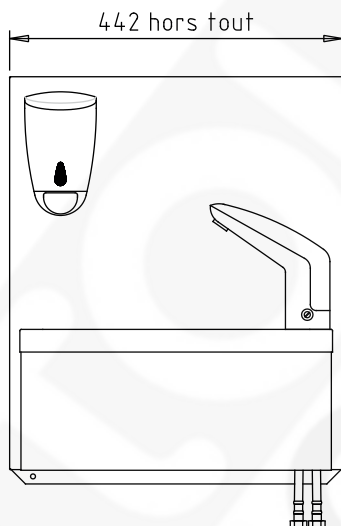

- Splash back 540 mm high : A = 520 mm.
- Splash back 790 mm high : A = 770 mm.