



Ventilation / Display Performance Considerations

- 1) Area in which display is to be sited must have a minimum room floor area no less than 28 sq m.
- 2) Install over a sealed floor or ventilated floor void.
- 3) Do not site the display within 2m of ceiling mounted air conditioning grilles.
- 4) Do not site the display beneath a high level of direct sunlight.
- 5) Display will operate in a 24 hour environment.

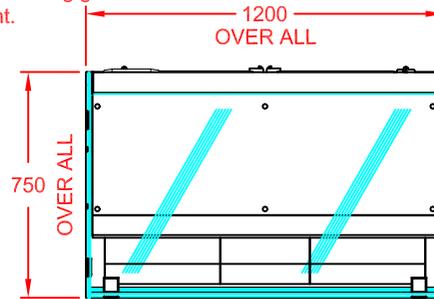


PLAN VIEW

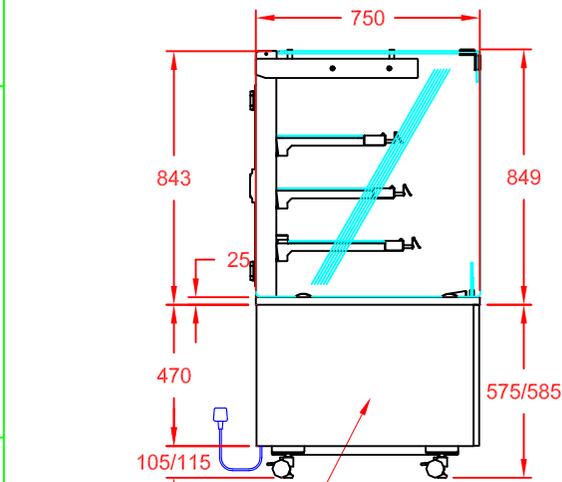


SIDE & FRONT FASCIA PANELS IN BLACK PLASTISOL AS STANDARD.  
 OPTIONAL SATIN ST/STL:  
 KSSP = SIDE PANELS,  
 KASF12 = FRONT PANEL

END VIEW

13A PLUG TOP & 3m LEAD  
 POWER SUPPLY:  
 13A, 230V, 1.68kW

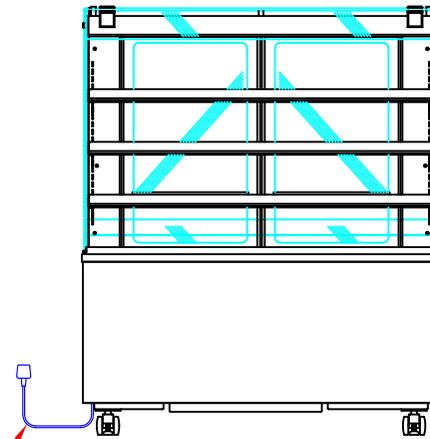

FRONT VIEW  
 (CUSTOMER SIDE)

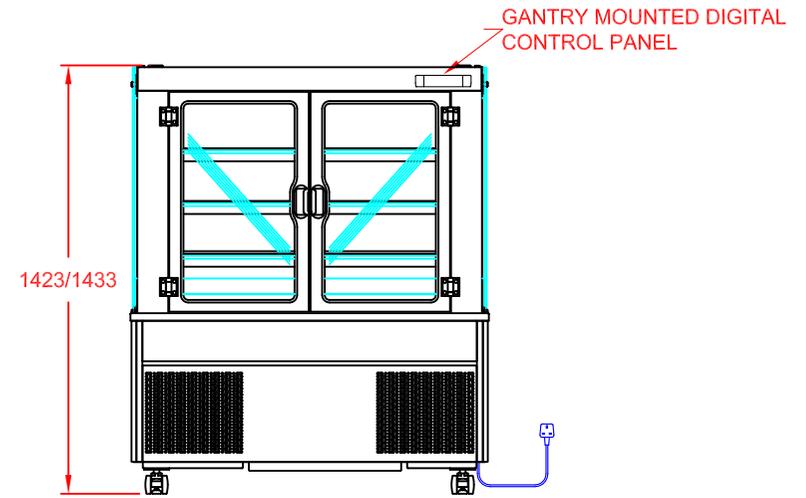

REAR VIEW  
 (OPERATOR SIDE)


APPROX. UN-CRATED  
 WEIGHT OF UNIT: 240Kg



CED FABRICATIONS LTD  
 UNITS A1-A4, FALCON COURT  
 CLAYTON BUSINESS PARK  
 CLAYTON-LE-MOORS  
 HYNDBURN  
 LANCASHIRE BB5 5JD

This drawing and information herein is confidential to CED Fabrications Ltd. It is issued in confidence that it will not be disclosed to any third party in part or in whole without permission from CED FABRICATIONS Ltd.

© CED FABRICATIONS LTD



**DESCRIPTION:**

CABINET KUBUS PATISSERIE  
 1200mm SELF HELP COLD - REAR DOORS  
 HYDROCARBON TYPE-R290 REFRIGERANT

SCALE: 1 : 25@A4

REV No: B

PRODUCT  
 CODE:

KPC12HT