



Ventilation / Display Performance Considerations

- 1) Area in which display is to be sited must have a minimum room floor area no less than 29 sq m.
- 2) Install over a sealed floor or ventilated floor void.
- 3) Do not site the display within 2m of ceiling mounted air conditioning grilles.
- 4) Do not site the display beneath a high level of direct sunlight.
- 5) Display will operate in a 24 hour environment.

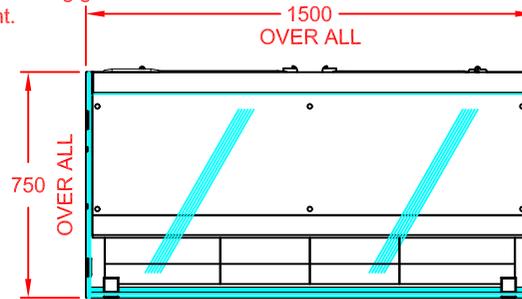


PLAN VIEW

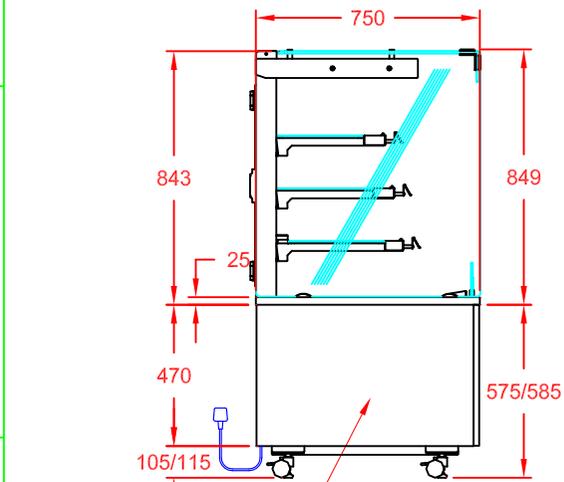


SIDE & FRONT FASCIA PANELS IN BLACK PLASTISOL AS STANDARD.
 OPTIONAL SATIN ST/STL:
 KSSP = SIDE PANELS,
 KASF15 = FRONT PANELS

END VIEW

13A PLUG TOP & 3m LEAD
 POWER SUPPLY:
 13A, 230V, 1.71kW

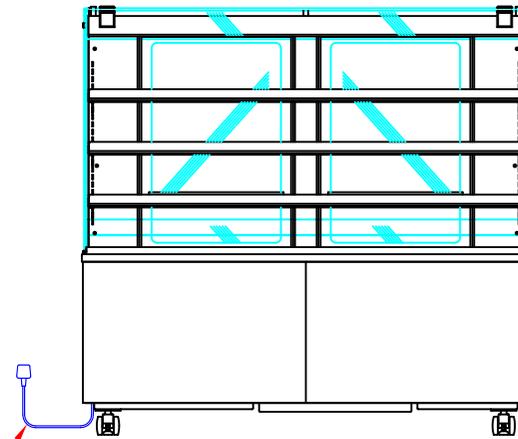

FRONT VIEW
 (CUSTOMER SIDE)

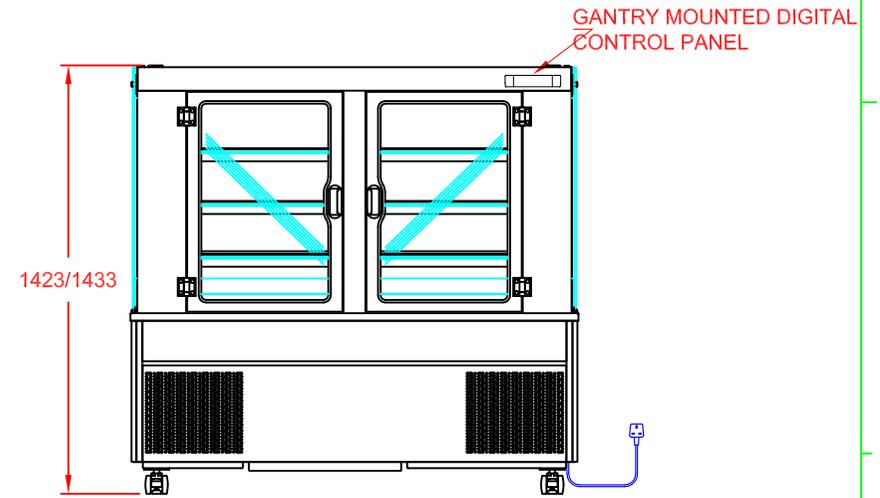

REAR VIEW
 (OPERATOR SIDE)


APPROX. UN-CRATED
 WEIGHT OF UNIT: 294Kg



CED FABRICATIONS LTD
 UNITS A1-A4, FALCON COURT
 CLAYTON BUSINESS PARK
 CLAYTON-LE-MOORS
 HYNDBURN
 LANCASHIRE BB5 5JD

This drawing and information herein is confidential to CED Fabrications Ltd. It is issued in confidence that it will not be disclosed to any third party in part or in whole without permission from CED FABRICATIONS Ltd.

© CED FABRICATIONS LTD



DESCRIPTION:

CABINET KUBUS PATISSERIE
 1500mm SELF HELP COLD - REAR DOORS
 HYDROCARBON TYPE-R290 REFRIGERANT

SCALE: 1 : 25 @ A4

REV No: A

PRODUCT
 CODE:

KPC15HT