



900mm Self Help Cold Patisserie (Fixed Back) Shown (Airflow In/Out Customer Side)



900mm Self Help Cold Patisserie (Rear Doors) Shown (Airflow In/Out Operator Side)

ABOUT

The energy efficient, environmentally friendly fan blown cold patisserie is part of the Kubus range of freestanding serve over height patisseries - a choice of cold, hot & ambient commercial displays to suit either self help or assisted service retail operations.

The cold serve over circulates a constant stream of cold air throughout the display area, maintaining pre-chilled food between 2- 5 degrees C, just right for your fruit and vegetables, sandwiches, yoghurts, salads and cold drinks.

This mobile self contained display is available in five different lengths, with locking, adjustable height levelling castors to easily position the equipment around your serving space. The display comprises four chilled display levels each illuminated by LED lighting.

Digital temperature control, auto defrost & the auto condensate evaporation tray allow 24 hour operation if required. All Kubus cold patisseries use a highly efficient, naturally occurring hydrocarbon refrigerant gas within hermetically sealed condensing units, which reduce energy consumption and your carbon footprint!

OPTIONS & FINISHES

Stainless Steel Front Fascia Panel

A ventilated or solid satin steel panel to suit particular model, in lieu of standard black panel.

Stainless Steel Side Panels (Pair)

A set of satin s/steel finish side panels, in lieu of standard black sides.

ACCESSORIES

Kickplinth (Set)

A magnet mounted set of s/steel kickplinths

Insulated Night Blind.

A factory fitted, energy saving insulated pull down night blind is available with hook fastening.



Night Blind

Kick Plinth

FEATURES

Download All Technical Drawings From www.cedfabsltd.co.uk

Model Sizes.

The Kubus self help or assisted service cold patisserie is an open or closed glass front cold patisserie, available in 600mm, 900mm, 1200mm, 1500mm & 1800mm lengths.

3 Tier Shelving & Deck Storage Capacity.

The display features 3 chilled glass shelves (adjustable in height & angle) & chilled s/ steel bottle storage deck below. The toughened glass shelving has product stops & 40mm(h) ticket strip holder to the front edge of each shelf.

LED Lighting.

Canopy & shelf lighting in a low energy LED fitting with opaque cover, colour 4000k.

Model Type: Self Help Cold Patisserie (Rear Doors).

Re-stocking access is by energy efficient, side hinged double glazed rear doors.

Cold Airflow: In Customer/ Out Operator (600mm) In/ Out Operator Side (Other Sizes)

Model Type: Self Help Cold Patisserie (Fixed Back).

This cold patisserie is supplied as wall sited with front control panel and stainless steel back panel for positioning in an alcove, against a wall or back to back, forming a central island grab and go station!

Cold Airflow: In Customer/ Out Operator c/w Wall Stand Off Bracket (600mm)

In/ Out Customer Side (Other Sizes)

Model Type: Assisted Service Cold Patisserie (Rear Doors).

Features a full glazed front screen that tilts forward for cleaning. Re-stocking access is through the energy efficient, side hinged double glazed rear doors.

Cold Airflow: In Customer/ Out Operator (600mm) In/ Out Operator Side (Other Sizes).

Panoramic Glass Side & Top Panels

Top glass allows for serve over operation & side glass panels add natural lighting.

Model Dimensions.

600mm/ 900mm/ 1200mm/ 1500mm & 1800mm (L) x 750mm (D) x 1423/ 1433mm (H).

Refrigeration Type.

Fan blown, hydrocarbon r290 energy efficient refrigeration.

System Design.

Auto defrost with 24 hour operation & digital temperature control.

Temperature Performance.

0°C to 5°C (max 27°C ambient 55% humidity).

Auto Drip Tray.

Integral auto evaporator condensate drip tray (float & micro switch).

Finishes.

Base panels finish plastisol steel, colour black (BS 00E53). Worktop & rear frame 430gd s/steel, deck area 304gd s/steel, toughened glass shelving.

Power Supply.

Supplied with 3m lead & 13 amp UK plug (13A 230v 50Hz).

Environmental Benefits.

Hydrocarbon refrigeration system (r290) has low global warming potential (GWP) & zero ozone depletion potential (ODP)

Equipment Conformity. CE & UKCA Certified equipment.

Self Help Cold Patisserie (Rear Doors)

Code Description

Code	Description	Dimensions (L x D x H mm)	Refrig. Airflow	Weight (kg)	Power Rating (kW)
KPC6HT	Kubus S.Help Cold Patiss. (R.Doors) 600mm	600 x 750 x 1423	Air In/Out	141	1.32
KPC9HT	Kubus S.Help Cold Patiss. (R.Doors) 900mm	900 x 750 x 1423	In Customer/ Out Operator	188	1.54
KPC12HT	Kubus S.Help Cold Patiss. (R.Doors) 1200mm	1200 x 750 x 1423	In Operator/ Out Operator	240	1.68
KPC15HT	Kubus S.Help Cold Patiss. (R.Doors) 1500mm	1500 x 750 x 1423	In Operator/ Out Operator	294	1.71
KPC18HT	Kubus S.Help Cold Patiss. (R.Doors) 1800mm	1800 x 750 x 1423	In Operator/ Out Operator	346	1.76

Model Description. Kubus self help cold patisserie, rear doors, 6/9/12/15/1800 (l) x 750(d) x 1423/1433 (h), chilled glass shelves (3) c/w ticket strips, chilled deck area (1), fan blown, hydrocarbon r290 energy efficient refrigeration, LED lighting each tier, colour 4000k. Automatic defrost, 24 hour operation, auto evaporator condensate tray, glazed side panels & d/ glazed rear doors. Front/side base panels in plastisol steel, colour black (BS 00E53). Controls to operator side. Lift off rear service panel, lockable adj. height castors, 3m lead, 13A 230v UK plug top.

Self Help Cold Patisserie (Fixed Back)

Code Description

Code	Description	Dimensions (L x D x H mm)	Refrig. Airflow	Weight (kg)	Power Rating (kW)
KPC6FBHT	Kubus S.Help Cold Patiss. (F.Back) 600mm	600 x 750 +75 x 1423	Air In/Out	141	1.32
KPC9FBHT	Kubus S.Help Cold Patiss. (F.Back) 900mm	900 x 750 x 1423	In Customer/ Out Operator	188	1.54
KPC12FBHT	Kubus S.Help Cold Patiss. (F.Back) 1200mm	1200 x 750 x 1423	In Customer/ Out Operator	240	1.68
KPC15FBHT	Kubus S.Help Cold Patiss. (F.Back) 1500mm	1500 x 750 x 1423	In Customer/ Out Operator	294	1.71
KPC18FBHT	Kubus S.Help Cold Patiss. (F.Back) 1800mm	1800 x 750 x 1423	In Customer/ Out Operator	346	1.76

Model Description. Kubus self help cold patisserie, fixed rear back panel (wall sited), 6/9/12/15/1800 (l) x 750(d) x 1423/1433 (h), chilled glass shelves (3) c/w ticket strips, chilled deck area (1), fan blown, hydrocarbon r290 energy efficient refrigeration, LED lighting each tier, colour 4000k. Automatic defrost, 24 hour operation, auto evaporator condensate tray, glazed side panels/ fixed back panel. Front/side base panels in plastisol black steel (BS 00E53). Controls to customer side. Lift off front service panel, lockable castors, 3m lead, 13A 230v UK plug top.

Assisted Service Cold Patisserie (Rear Doors)

Code Description

Code	Description	Dimensions (L x D x H mm)	Refrig. Airflow	Weight (kg)	Power Rating (kW)
KPC6ASHT	Kubus A.Serve Cold Patiss. (R.Doors) 600mm	600 x 750 x 1423	Air In/Out	144	1.17
KPC9ASHT	Kubus A.Serve Cold Patiss. (R.Doors) 900mm	900 x 750 x 1423	In Customer/ Out Operator	191	1.36
KPC12ASHT	Kubus A.Serve Cold Patiss. (R.Doors) 1200mm	1200 x 750 x 1423	In Operator/ Out Operator	243	1.57
KPC15ASHT	Kubus A.Serve Cold Patiss. (R.Doors) 1500mm	1500 x 750 x 1423	In Operator/ Out Operator	298	1.71
KPC18ASHT	Kubus A.Serve Cold Patiss. (R.Doors) 1800mm	1800 x 750 x 1423	In Operator/ Out Operator	349	1.76

Model Description. Kubus ass. serve cold patiss. front glass, 6/9/12/15/1800 (l) x 750(d) x 1423/1433 (h), rear doors, chilled glass shelves (3) c/w ticket strips, chilled deck area (1), fan blown, hydrocarbon r290 energy efficient refrigeration, LED lighting each tier, colour 4000k. Automatic defrost, 24 hour operation, auto evaporator condensate tray, glazed side panels & d/ glazed rear doors. Front/side base panels in plastisol steel, colour black (BS 00E53). Controls to operator side. Lift off rear service panel, lockable adj. height castors, 3m lead, 13A 230v UK plug top.



Kubus Serve Over Cold Patisserie

OPTIONS & DIMENSIONS



Option: Night Blind



Option: Kickplinth (Set)

Night Blind (Factory Fit)

Code	Description	For Model (Code)	Dimensions (L x H mm)	Weight (kg)
KNB6	Night Blind (Self Help Patiss. Doors)	KPC6HT	545 x 780	0.5
KNB9	Night Blind (Self Help Patiss. Doors)	KPC9HT	845 x 780	1
KNB12	Night Blind (Self Help Patiss. Doors)	KPC12HT	1145 x 780	1
KNB15	Night Blind (Self Help Patiss. Doors)	KPC15HT	1445 x 780	1.4
KNB18	Night Blind (Self Help Patiss. Doors)	KPC18HT	1745 x 780	1.7
KNB6FB	Night Blind (Self Help Patiss. F.Back)	KPC6FBHT	545 x 780	0.5
KNB9FB	Night Blind (Self Help Patiss. F.Back)	KPC9FBHT	845 x 780	1
KNB12FB	Night Blind (Self Help Patiss. F.Back)	KPC12FBHT	1145 x 780	1
KNB15FB	Night Blind (Self Help Patiss. F.Back)	KPC15FBHT	1445 x 780	1.4
KNB18FB	Night Blind (Self Help Patiss. F.Back)	KPC18FBHT	1745 x 780	1.7

(Self Help Cold Patisserie)

Option Description.
Insulated pull down night blind, hook fastening, energy saving. Factory fit.


Kick Plinth: (S/Steel Satin Finish - Set)

Code	Description	Dimensions (Height mm)	Weight (kg)
PKICK6C	Kickplinth (S/Steel Satin Finish) Set (4)	105	1.8
PKICK9C	Kickplinth (S/Steel Satin Finish) Set (4)	105	2
PKICK12C	Kickplinth (S/Steel Satin Finish) Set (4)	105	3
PKICK15C	Kickplinth (S/Steel Satin Finish) Set (4)	105	4
PKICK18C	Kickplinth (S/Steel Satin Finish) Set (4)	105	5.5

(All Cold Patisseries)

Option Description.
Set of stainless steel kickplinths, magnet mounted fastening to base. Satin s/steel finish.

Option: Control Customer Side

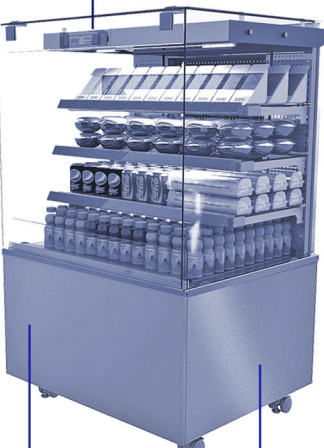

Option: Steel Side Panels
Option: Steel Front Fascia Panel

Gantry Controls (To Customer Side)

Code	Description	For Model (Code)
KCUSP6	600 Controls To Customer Side (Self Help Patiss. Doors)	KPC6HT
KCUSP9	900 Controls To Customer Side (Self Help Patiss. Doors)	KPC9HT
KCUSP12	1200 Controls To Customer Side (Self Help Patiss. Doors)	KPC12HT
KCUSP15	1500 Controls To Customer Side (Self Help Patiss. Doors)	KPC15HT
KCUSP18	1800 Controls To Customer Side (Self Help Patiss. Doors)	KPC18HT

(Self Help Cold Patisserie)

Option Description.
Controls to customer side gantry: In lieu of std. operator side position.

Front Fascia Panel (S/Steel Satin Finish)

Code	Description	For Models (Code)
KCSF6	600 Front Panel - Vented	KPC6HT - KPC6ASHT - KPC6FBHT
KCSF9	900 Front Panel - Vented	KPC9FBHT
KCSF12	1200 Front Panel - Vented	KPC12FBHT
KCSF15	1500 Front Panel - Vented (2 Part)	KPC15FBHT
KCSF18	1800 Front Panel - Vented (2 Part)	KPC18FBHT
KASF9	900 Front Panel - Solid	KPC9HT - KPC9ASHT
KASF12	1200 Front Panel - Solid	KPC12HT - KPC12ASHT
KASF15	1500 Front Panel - Solid (2 Part)	KPC15HT - KPC15ASHT
KASF18	1800 Front Panel - Solid (2 Part)	KPC18HT - KPC18ASHT

(All Cold Patisseries)

Option Description.
Stainless steel front fascia panel, (in lieu of std. black front panel). Supplied ventilated or solid to suit particular model standard airflow. Satin s/steel finish.

Side Panels (Set) (S/Steel Satin Finish)

Code	Description	For Models
KSSP	Side Panels (S/Steel: Satin) Set (2)	All Cold Models

(All Cold Patisseries)

Option Description.
S/ steel side panels, Set of 2. Satin s/steel finish.

Airflows (Plan View)

