




# Wall Sited Heated Twin Plate Dispenser

(For 205mm - 305 mm Plates)

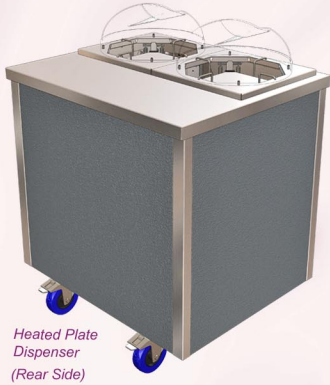

## ABOUT

The wall sited twin heated plate dispenser forms part of the Glide range of mobile dining carts - a choice of cold, hot & ambient commercial catering carts that combine to form a food service counter solution as unique as your requirements!

The dispenser has two spring loaded, self levelling plate storage sections within a s/steel worktop. Each spring loaded dispenser section is adjusted by lifting the four plate guide rods inwards/ outwards, to enable the storage of various diameter plates, between 8"-12" (205mm-305mm) with a total capacity of 88 -106 plates, depending on type. The springs keep the plates below rising to the top of the dispenser, as top plates are removed. Springs can be easily removed to facilitate smaller and lighter weight plates.

Each plate storage section is supplied with a stackable polycarbonate lid, for use during the plate heating process - to retain heat within the dispenser. The rear/ side base panels are in leathergrain plastisol steel, colour merlin grey (BS 18B25), customer side panel is s/steel. The wall sited dispenser has lockable castors and control panel to customer side. It is supplied with 3m lead and a 13A UK plug top (0.75 Kw). The dispenser heats plates by use of a thermostat knob & fan assisted heating, which controls the internal air at a max. temperature of 85 degrees C. A neon power on/off switch is also fitted.

## ACCESSORIES & FINISHES

**Folding Steel Solid or Tubular Tray Slides.**  
Drop down tray rails or slides + 40mm (d) height = (h) - 55mm.

**Selection Of Colour Finishes To Bases.**  
11 alternative choices of durable steel, colour & wood effect for the external rear/ side base panels.



## HEIGHT OPTIONS

**Low Height Model (Glide Junior).**  
850mm or 800mm high options for junior/ primary use.



Download All Technical Drawings From [www.cedfabsltd.co.uk](http://www.cedfabsltd.co.uk)

## FEATURES

### Model Type.

The wall sited Glide heated plate dispenser is a mobile, self levelling, spring loaded plate dispenser with internal fan assisted heating element, full front/ side fascia panels & s/steel worktop. Heating is controlled by customer facing thermostat knob (max 85 deg C). The dispenser has two storage sections- total capacity of 88 -106 plates, depending on type. These can be adjusted for 8"-12"(205mm-305mm) diameter plates. The dispensers lift out so springs can be removed to allow for using the dispenser with smaller and lighter plates.

### Model Dimensions.

The twin plate dispenser base is 2-1Gn (825mm) long x 700mm (D), 900mm (H) & has locking heavy duty castors.

### Model Finishes.

Base and outer end panels in plastisol steel, colour merlin grey. The dispenser worktop is made from 304 gd s/steel & the front panel & corner surfaces are in 430gd.s/steel.

### Low Maintenance.

Easy, cleanable surfaces and a durable design ensure low maintenance for users.

### Finishes & Options.

The wall sited heated plate dispenser can be customised with many accessories such as tray slides, tray rails, colour finishes and low height versions for junior/ primary age use. A wall sited heated plate dispenser is suitable for alcoves or recesses c/w front facing controls, low heights options & colour finishes for base panels & sides.

### Power Supply.


The dispenser is fitted with a 3m lead & 13 amp UK plug (13A 230v 50Hz). The unit has a 1.4kW electrical supply.

**Equipment Conformity.** CE & UKCA Certified equipment.

### Temperature Controls.

The fan assisted heated plate dispenser features a thermostat control. Mains power is operated by individual neon indicator switch.

(Wall Sited Heated Plate Dispenser)



## Glide (Wall Sited) Twin Heated Plate Dispenser.

Code	Description	Capacity (Gn)	Dimensions (L x D x H mm)	Depth With Tray Slide Up/ Down	Weight (kg)	Total Power (kW)
GWSHPD2	Glide Wall Site Hot 2x Plate Disp. 2-1	825 x 700 x 900	1000/ 740mm	55	1.4	

**Model Description.** (GWSHPD2) Glide heated twin plate dispenser trolley (wall sited), s/steel worktop, spring loaded self levelling, adjustable to suit 205-305mm (diam) 8-12" plates, plate dispenser has fan assisted heating, thermostat control (max 85 deg C) & neon mains power on/off switch to customer side, 825(l) x 700(d) x 900mm(h), total capacity 88 -106 plates, depending on type, c/w polycarbonate lids, removable dispensers for weight (spring) adjustment, customer side front panel in s/steel, wall side rear & side base panels in leathergrain plastisol steel, colour merlin grey (BS 18B25), lockable castors, 13A UK plug top, spiral lead, 1.4kw.

*\*For best performance always keep polycarbonate lids on when heating plates prior to serving\**

## Glide S/Steel Folding Tubular Tray Rail

Code	Description	Capacity (Gn)	Dimensions (L x D x H mm)	Weight (kg)
GTTS2	Glide S/Steel Drop Down Tray Rail	2-1 Gn	825 x 298 x (base-55)	2

## For 2x Hot Plate Disp. (Wall Sited)

**Option Description.**  
S/steel tubular tray rail, 304 gd. Ø25 tube, drop down bracket type, up position depth + 298 mm to base unit, down position depth + 40mm to base unit. Trayslide height = base unit (h) - 55mm.

## Glide S/Steel Folding Solid Tray Slide

Code	Description	Capacity (Gn)	Dimensions (L x D x H mm)	Weight (kg)
GSTS2	Glide S/Steel Drop Down Solid Tray Slide	2-1Gn	825 x 302 x (base-55)	3


## For 2x Hot Plate Disp. (Wall Sited)

**Option Description.**  
S/steel solid tray slide, drop down bracket type, up position depth + 302 mm to base unit, down position depth + 40mm to base unit. Trayslide height = base unit (h) - 55mm.



# Wall Sited Heated Twin Plate Dispenser

OPTIONS, FINISHES, & POPULAR MODEL CODES



## Low Height Model (Glide Junior) - 800/ 850mm (h)

Code	Description	Base Height (mm)	Optional Tray Slide Height (mm)
G800H**	Glide Base Unit 800mm Height	800	745
G850H	Glide Base Unit 850mm Height	850	795

\*\*G800H Bespoke Option (With Extended lead Time)

## For 2x Hot Plate Disp. (Wall Sited)

**Option Description.**  
Lower height option codes for junior/ primary use.  
**\*\*800mm (h) base unit, c/w 100mm lockable castors. (Optional trayslide height becomes 745mm high)\*\***  
**850mm (h) base unit, c/w 100mm lockable castors. (Optional trayslide height becomes 795mm high).**

## Colour Finishes To Base Panels (Rear & Sides)

11 choices of leathergrain plastisol steel colours/ wood effect laminated steel for rear fascia panel/ external ends (front panel in s/steel)




**Ocean Blue (BS 18C37)**  
Code Description Capacity  
GBLUECHA2 Glide Blue Side/ Rear Fascia 2-1Gn



**Goosewing Light Grey (BS 10A05)**  
Code Description Capacity  
GGREYCHA2 Glide Grey Side/ Rear Fascia 2-1Gn



**Poppy Red (BS 04E5B)**  
Code Description Capacity  
GPREDCHA2 Glide Red Side/ Rear Fascia 2-1Gn



**White (BS 00E55)**  
Code Description Capacity  
GWHITCHA2 Glide White Side/ Rear Fascia 2-1Gn



**Wood Grain Effect Panels DL85 Walnut Finish**  
Code Description Capacity  
GWALNCHA2 Glide Walnut Side/ Rear Fascia 2-1Gn



**Satin S/Steel (430 gd.)**  
Code Description Capacity  
GSSTLCHA2 Glide S/Steel Side/ Rear Fascia 2-1Gn



**Forest Green/Heritage (RAL 6002)**  
Code Description Capacity  
GGRENCHA2 Glide Green Side/ Rear Fascia 2-1Gn



**Buttermilk Cream/ Honesty (BS 10C31)**  
Code Description Capacity  
GCREMCHA2 Glide Cream Side/ Rear Fascia 2-1Gn



**Black (BS 00E53)**  
Code Description Capacity  
GBLAKCHA2 Glide Black Side/ Rear Fascia 2-1Gn



**Wood Grain Effect Panels DL76 Beech Finish**  
Code Description Capacity  
GBEECCHA2 Glide Beech Side/ Rear Fascia 2-1Gn



**Wood Grain Effect Panels DL84 Oak Finish**  
Code Description Capacity  
GOAKCHA2 Glide Oak Side/ Rear Fascia 2-1Gn

## POPULAR MODEL CODES



### Glide 2x Heated Plate Disp. (Wall Sited)

Model Code	Description	Total Power (kW)
GWSHPD2	Glide Wall Site 2x Heated Plate Disp. 2-1 Gn	1.4

\*Requires 13A 230V Elec. Socket.

### Glide 2x Heated Plate Disp. (Wall Sited) (& Colour Finish - Blue)

Model Code	Option Code	Description	Total Power (kW)
GWSHPD2	GBLUECHA2	Hot 2x Plate Disp.+(Blue) 2-1	1.4

\*Requires 13A 230V Elec. Socket.



### Glide 2x Heated Plate Disp. (Wall Sited) (& Tray Slide)

Model Code	Option Code	Description	Total Power (kW)
GWSHPD2	GSTS2	Hot 2x Plate Disp. & T.Slide 2-1 Gn	1.4

\*Requires 13A 230V Elec. Socket.

### Glide 2x Heated Plate Disp. (Wall Sited) (& Tray Rail)

Model Code	Option Code	Description	Total Power (kW)
GWSHPD2	GTTS2	Hot 2x Plate Disp. & T. Rail 2-1	1.4

\*Requires 13A 230V Elec. Socket.



### Glide 2x Heated Plate Disp. (Wall Sited) (& Colour Finish - Green)


Model Code	Option Code	Description	Total Power (kW)
GWSHPD2	GGRENCHA2	Hot 2x Plate Disp.+(Green) 2-1	1.4

\*Requires 13A 230V Elec. Socket.


### Glide 2x Heated Plate Disp. (Wall Sited) (& Tray Rail & Colour Finish - Red)

Model Code	Option Code	Option Code	Description	Total Power (kW)
GWSHPD2	GTTS2	GPREDCHA2	Hot Plate Disp./T.Rail+(Red)	1.4


\*Requires 13A 230V Elec. Socket.



Glide Hot Plate Dispenser (Wall Sited)



Glide Hot Plate Disp. & Tray Rail (Wall Sited)



Glide Hot Plate Disp. & Tray Slide (Wall Sited)

