

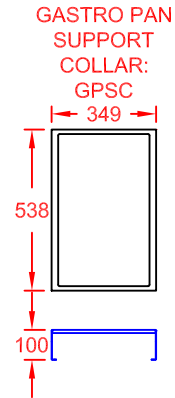
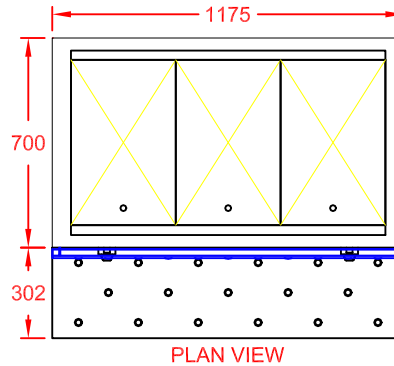
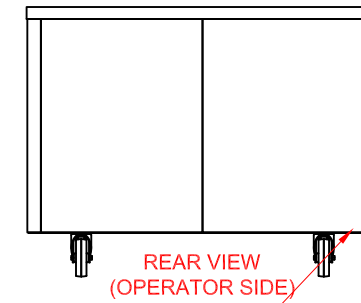


Ventilation / Display Performance Considerations

- 1) Area in which display is to be sited must have a minimum room floor area no less than 17 sq m.
- 2) Install over a sealed floor or ventilated floor void.
- 3) Do not site the display within 2m of ceiling mounted air conditioning grilles.
- 4) Do not site the display beneath a high level of direct sunlight.
- 5) Display will operate in a 24 hour environment.

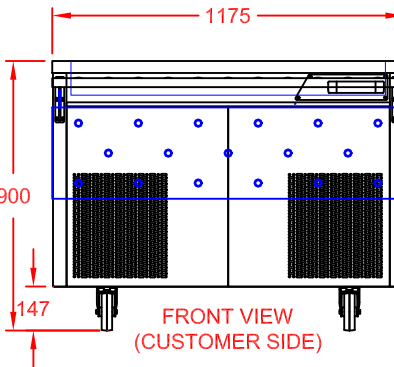

COLOUR FINISH (FRONT & SIDES)	OPTION CODE
MERLIN GREY	STANDARD
OCEAN BLUE	GBLUEWSC3
GOOSEWING LIGHT GREY	GGREYWSC3
POPPY RED	GPREDWSC3
WHITE	GWHITWSC3
FOREST GREEN / HERITAGE	GGRENWSC3
BUTTERMILK CREAM / HONESTY	GCREMWSC3
BLACK	GBLAKWSC3
WALNUT	GWALNWSC3
BEECH	GBEECWSC3
OAK	GOAKWSC3
SATIN S/STEEL	GSSTLWSC3

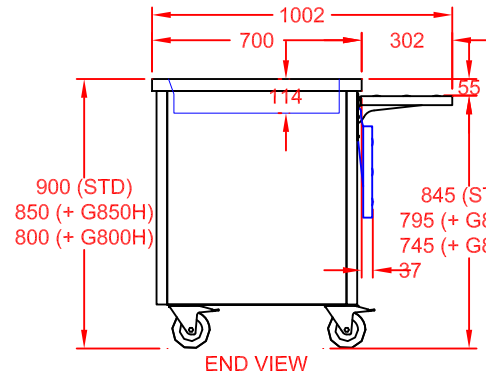

13A PLUG TOP & 3m CABLE ENTRY
POWER SUPPLY: 13A, 230V, 1.22kW


APPROX. UN-CRATED
WEIGHT OF UNIT: 130Kg



CED FABRICATIONS LTD
UNITS A1-A4, FALCON COURT
CLAYTON BUSINESS PARK
CLAYTON-LE-MOORS
HYNDBURN
LANCASHIRE BB5 5JD

This drawing and information herein is confidential to CED Fabrications Ltd. It is issued in confidence that it will not be disclosed to any third party in part or in whole without permission from CED FABRICATIONS Ltd.

© CED FABRICATIONS LTD



DESCRIPTION:

GLIDE DINING CARTS
3-1 COLD WELL (R290 REFRIGERANT)
+ (WALL SITED) FRONT AIRFLOW PANELS
NO GANTRY
+ S/STEEL FOLDING SOLID TRAY SLIDE

SCALE: 1 : 25 @ A4

REV No: A

PRODUCT
CODE:

GCW3HT + GCWWS3
+ GSTS3