



DISPLAYS - PRICE LIST 2025

BAIN MARIE · CERAN · CHILLED WELL · PATISSERIES · PLUS MANY MORE

WHAT'S NEW

CED Fabrications LTD

New Table Top Heated Display

Hot Hold/Grab 'n' Go. These energy efficient, hot merchandisers are factory pre-set at 75°C and offer customers two tiers of independently controlled grab 'n' go hot food holding, within a minimal 763mm (w) footprint. The 13A heated self-help s/steel displays are finished in a signature food safe black coating & are ideal for the display of pre-heated cooked food, packaged, cartoned or unwrapped heated product. A branded header panel with vinyl transfer can be provided.

Model Types Available. Freestanding: Choose from either single tier or 2 tier versions with inclined or straight display shelves (controls to rear). Wall Sited: Alternatively choose a wall sited version either single or 2 tier (controls to front customer side) depending on your available location.



TABLE TOP!



DROP IN VERSION!

ENERGY EFFICIENT

MIRROR GLASS DOORS

New Drop In Kubus & Designline Patisseries

New for 2025 CED introduce a full range of 'drop in' serve over height patisseries in a wide choice of cold, hot & ambient displays to fit in servery counter worktops. The flexible self-contained chilled patisserie is available in 600, 900, 1200, 1500 & 1800 long with rear doors or fixed back panels, for strategically positioning around your serving space. Each chilled display comprises four illuminated chilled display levels with 4000K colour LED lighting. The new 600, 900 & 1200 wide drop in hot patisseries are ideal for display of pre-heated cooked food, whether packaged or unwrapped. By using static heating, convection heat & removable wire shelf grid covers, the temperature of the 3 heated zones can be independently set by digital displays on the control panel which mount in the counter body.

New Freestanding Kubus & Designline Patisseries

A new range of Kubus & Designline freestanding cold, ambient & heated patisseries also launch in 2025 with additional 1500 & 1800 sizes added to increase the range. All freestanding patisseries now come with black base panels pre-fitted & heated models now operate as a plug and go 13A unit in all 3 sizes. The freestanding 900, 1200, 1500 & 1800 long chilled (rear door) patisserie models are re-engineered with airflow in/out to the rear as standard. The same sized wall sited chilled models now feature airflow in/out to the front. Optional kick plinths, night blinds & steel finish base panels can be added also.

New Scenic Food Display Deli Drop Ins

CED also introduce a square profile Deli range of drop in displays in both heated & chilled format. Fitted with reflective rear doors for optimum deli food presentation and offered as self-help or assisted service operation, the bain marie & chilled deli are also both available as 1/1 Gn depth & 1/1+1/3 Gn depth. All 2/1, 3/1, 4/1 & 5/1 Gn long hot & cold models can be fitted with optional preparation shelf extensions & cutting boards. The bain marie model can also feature optional humidity control.

CONTENTS

CED Displays

What's NEW	2
Contents	3
Dry Heat Bain Marie	4
Dry Heat Bain Marie & Heated Midshelf	5
Wet Well Bain Marie (Manual Fill)	6
Ceran Glass Hotplate	7
Ceran Glass Hotplate & Heated Midshelf	8
Dry Heat Bain Marie 1/1 GN & Ceran Glass Hotplate 1/1 GN	9
Assisted Service Heated Deli	10
Self Help Dry Heat Soup Unit & Heated Gantries	11
Chilled Hydrocarbon Introduction	12
Cold Well (HT)	13
Self Help Cold Island Well (HT)	14
Cold Tiered Well (HT)	15
Cold Multideck (Rear Doors/Fixed Back)(HT)	16
Cold Multideck (Roller Shutter) (HT)	17
Cold Deli (HT)	18
Cold Multi Level Deli (HT)	19
Cold Tiered Deli (HT)	20
Cold Displays (No Gantry) (HT) Heated Displays (No Gantry)	21
Contact Cool Well	22
Frost Tops (HT)	23
Ambient Gantry - Self Help	24
Ambient Multi Level Gantry - Self Help	25
Ambient Multi Level Gantry - Under Shelf Lights	26
Ambient Multideck	27
Cutlery / Condiment Unit	28
Confectionary Display Stand	29
Drop-in Display Accessories	30/31
Scenic Dry Heat Bain Marie	32
Scenic Cold Deli (HT)	33
Drop-in Cold Patisserie (HT)	34
Drop-in Heated Patisserie	35
Drop-in Ambient Patisserie	36
Drop-in Patisserie Accessories	37
Cold Patisserie (HT)	38
Heated Patisserie	39
Ambient Patisserie	40
Patisserie Accessories	41
Glass Display King (HT)	42
Table Top Heated Merchandisers	43
Site Map & Contact Details	44

DRY HEAT BAIN MARIE

Kubus & Designline Drop-ins



Kubus
Self Help

EASY USE:
Gantry
mounted
controls



Designline
Self Help



Kubus
Assisted Service



Designline
Assisted Service

DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabstld.co.uk

Main Features

- ▶ **KUBUS**
Self Help: Flat toughened glass sneeze guard profile. Assisted Service: Full height flat front & side glass sneeze guard profile. Both are designed to compliment other units within the Kubus range.
- ▶ **DESIGNLINE:**
Self Help: Curved toughened glass sneeze guard profile. Assisted Service: Full height curved front & end glass sneeze guard profile. Both are designed to compliment other units within the Designline range.
- ▶ Dry heat bain marie tank with individual 1/1GN support collars to accept 100/150mm deep s/ steel gastronorm containers (not supplied).
- ▶ 'Touch safe' gantry mounted digital temperature display and eye level control panel (operator side).
- ▶ Base heat and top heat are separately controlled.

- ▶ Top heat is variably controlled from a gantry mounted dimmer switch.
- ▶ 24-hour operation as standard.
- ▶ Superstructure in bright polished, satin steel and aluminium profile.
- ▶ Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.
- ▶ Supplied with concealed under counter control box on a 2m loom for connection to 13 Amp/ 16 Amp/ 20 Amp/ 32 Amp supply.

Special features

- ▶ **Illumination**
KUBUS: Product Illumination/surface heat is provided from a rectangular profile gantry. DESIGNLINE: Product Illumination/surface heat is provided from an elliptical profile gantry.
- ▶ Features 'tamper proof' temperature control facility.
- ▶ Base heat output is thermostatically controlled

from the gantry mounted control panel giving even heat spread.

Food Display long term holding (2-4 hours)

Breakfast
Baked beans, tomatoes, bacon, sausage, black pudding, mushrooms, hash browns.

Lunch/dinner
Stews, curry, chilli dishes, sliced meats in gravy or sauce, pasta in sauce, vegetables, ribs with sauce, chicken portions.

Short term holding (15-20 mins)

Breakfast/ brunch
Omelettes, fried / boiled eggs, baked potatoes.

Lunch/dinner
Battered fish, chips / fries.

Dry Heat Bain Marie

Self Help

Kubus Model	KHBM2	KHBM3	KHBM4	KHBM5	KHBM6
Price	£3,313	£3,683	£4,089	£4,540	£5,009
Designline Model	HBM2	HBM3	HBM4	HBM5	HBM6
Price	£3,153	£3,505	£3,891	£4,321	£4,766
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN	6/1 GN
Length (mm)	825	1175	1525	1875	2225
Depth (mm)	660	660	660	660	660
Height above worktop (mm)	Kubus > 540 Designline > 535	540 535	540 535	540 535	540 535
Depth below worktop (mm)	220	220	220	220	220
Weight (uncrated) (kg)	Kubus > 38 Designline > 33	49 44	60 55	71 66	83 78
Power (kW)	1.6	2.4	3.0	4.0	4.8
Electrical supply	13A 230V	13A 230V	13A 230V	20A 230V	32A 230V

Assisted Service

KHBM2+KAS2	KHBM3+KAS3	KHBM4+KAS4	KHBM5+KAS5	KHBM6+KAS6	
£3,761	£4,172	£4,893	£5,659	£6,240	
HBM2+AS2	HBM3+AS3	HBM4+AS4	HBM5+AS5	HBM6+AS6	
£3,601	£3,996	£4,692	£5,440	£6,000	
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN	6/1 GN
Length (mm)	825	1175	1525	1875	2225
Depth (mm)	660	660	660	660	660
Height above worktop (mm)	540	540	540	540	540
Depth below worktop (mm)	220	220	220	220	220
Weight (uncrated) (kg)	52	66	78	91	105
Power (kW)	44	56	69	82	95
Electrical supply	1.6	2.4	3.0	4.0	4.8
	13A 230V	13A 230V	13A 230V	20A 230V	32A 230V

* These models have controls fitted on operator side of gantry as standard. If controls are required on customer side i.e. for wall sited counters, please state 'controls to customer side' when ordering.

* These models have controls fitted on operator side of gantry.

DRY HEAT BAIN MARIE & HEATED MIDSHELF

Kubus & Designline Drop-ins



DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk

Main Features

- **KUBUS Self Help:** Flat toughened glass sneeze guard profile. Assisted Service: Full height flat front & side glass sneeze guard profile. Both are designed to compliment other units within the Kubus range.
- **DESIGNLINE Self Help:** Curved toughened glass sneeze guard and end glass profile. Assisted Service: Full height curved front & end glass sneeze guard profile. Both are designed to compliment other units within the Designline range.
- Dry heat bain marie tank with individual 1/1GN support collars to accept 100/150mm deep s/ steel gastronorm containers (not supplied).
- Additional eye level heated mid shelf – ideal for plated meal presentation.
- 'Touch safe' gantry mounted digital temperature display and eye level control panel (operator side).

- Base heat and top heat are separately controlled.
- Top heat is variably controlled from 2 no.gantry mounted dimmer switches.
- 24-hour operation as standard.
- Superstructure in bright polished, satin steel and aluminium profile.
- Supplied with concealed under counter control box on a 2m loom for connection to 13 Amp/ 16 Amp/ 20 Amp/ 32 Amp supply.

Special features

- **Illumination**
Kubus: Product Illumination/surface heat is provided from a rectangular profile gantry. Designline: Product Illumination/surface heat is provided from an elliptical profile gantry.
- Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.
- Features 'tamper proof' temperature control facility.

- Base heat output is thermostatically controlled from the gantry mounted control panel giving even heat spread.

Food Display long term holding (2-4 hours)

Breakfast
Baked beans, tomatoes, bacon, sausage, black pudding, mushrooms, hash browns.

Lunch/dinner
Stews, curry, chilli dishes, sliced meats in gravy or sauce, pasta in sauce, vegetables, ribs with sauce, chicken portions.

Short term holding (15-20 mins)

Breakfast/ brunch
Omelettes, fried / boiled eggs, baked potatoes.

Lunch/dinner
Battered fish, chips / fries.

Dry Heat Bain Marie & Heated Midshelf

Self Help

Kubus Model	KHBM2PS	KHBM3PS	KHBM4PS	KHBM5PS
Price	£5,328	£5,889	£6,454	£7,008
Designline Model	HBM2PS	HBM3PS	HBM4PS	HBM5PS
Price	£5,061	£5,595	£6,132	£6,658
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN
Length (mm)	825	1175	1525	1875
Depth (mm)	660	660	660	660
Height above worktop (mm)	Kubus > 700 Designline > 695	700 695	700 695	700 695
Depth below worktop (mm)	220	220	220	220
Weight (uncrated) (kg)	Kubus > 65 Designline > 55	76 66	87 77	98 88
Power (kW)	2.2	3.3	4.4	5.5
Electrical supply	13A 230V	16A 230V	20A 230V	32A 230V

* These models have controls fitted on operator side of gantry as standard. If controls are required on customer side i.e. for wall sited counters, please state 'controls to customer side' when ordering.

Assisted Service

KHBM2PS+KAS2PS	KHBM3PS+KAS3PS	KHBM4PS+KAS4PS	KHBM5PS+KAS5PS
£5,490	£6,275	£7,148	£7,731
N/A	HBM3PS+AS3PS	HBM4PS+AS4PS	N/A
-	£5,978	£6,828	-
2/1 GN	3/1 GN	4/1 GN	5/1 GN
825	1175	1525	1875
660	660	660	660
700	700	700	700
-	695	695	-
220	220	220	220
71	84	98	111
-	74	87	-
2.2	3.3	4.4	5.5
13A 230V	16A 230V	20A 230V	32A 230V

* These models have controls fitted on operator side of gantry.

WET WELL BAIN MARIE (MANUAL FILL)

Kubus & Designline Drop-ins



Kubus Self Help

WET WELL DESIGN:
Reduces food deposits in container bases

Available in both Kubus or Designline model styles



Designline Self Help



Kubus Assisted Service



Designline Assisted Service

DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk

Main Features

- **KUBUS**
Self Help: Flat toughened glass sneeze guard profile. Assisted Service: Full height flat front & side glass sneeze guard profile. Both are designed to compliment other units within the Kubus range.
- **DESIGNLINE:**
Self Help: Curved toughened glass sneeze guard profile. Assisted Service: Full height curved front & end glass sneeze guard profile. Both are designed to compliment other units within the Designline range.
- Manually filled wet well bain marie tank with individual 1/1GN support collars to accept 100/150mm deep s/steel gastronorm containers.
- Manual fill with 3/4" B.S.P. lever arm waste for site drain connection or manual emptying.
- 'Touch safe' gantry mounted digital temperature display and eye level control panel (operator side).

- Base heat and top heat are separately controlled.
- Top heat is variably controlled from a gantry mounted dimmer switch.
- 24-hour operation as standard.
- Superstructure in bright polished, satin steel and aluminium profile.
- Wet well design reduces food deposits in container bases.
- Superstructure in bright polished, satin steel and aluminium profile.
- Supplied with concealed under counter control box on a 2m loom for connection to 13 Amp/ 16 Amp/ 20 Amp or 32 Amp supply.

Special features

- **Illumination**
Kubus: Product Illumination/surface heat is provided from a rectangular profile gantry. Designline: Product Illumination/surface heat is provided from an elliptical profile gantry.
- Features 'tamper proof' temperature control facility.

- Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.
- Base heat output is thermostatically controlled from the gantry mounted control panel giving even heat spread.

Food Display long term holding (2-4 hours)

Breakfast
Baked beans, tomatoes, bacon, sausage, black pudding, mushrooms, hash browns.

Lunch/dinner
Stews, curry, chilli dishes, sliced meats in gravy or sauce, pasta in sauce, vegetables (dry or in liquid), ribs with sauce, chicken portions.

Short term holding (15-20 mins)

Breakfast/ brunch
Omelettes, fried/ boiled eggs, baked potatoes.

Lunch/dinner
Battered fish, chips / fries, pizza.

Wet Well Bain Marie (Manual Fill)

Self Help

Kubus Model	KHBMW2	KHBMW3	KHBMW4	KHBMW5	KHBMW6
Price	£4,363	£4,556	£4,819	£5,489	£5,841
Designline Model	HBMW2	HBMW3	HBMW4	HBMW5	HBMW6
Price	£4,156	£4,341	£4,592	£5,227	£5,564
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN	6/1 GN
Length (mm)	825	1175	1525	1875	2225
Depth (mm)	660	660	660	660	660
Height above worktop (mm)	Kubus > 540	540	540	540	540
Designline >	535	535	535	535	535
Depth below worktop (mm)	220	220	220	220	220
Drain connection depth (mm)	+125	+125	+125	+125	+125
Weight (uncrated) (kg)	Kubus > 40	53	63	75	87
Designline >	35	48	58	70	82
Power (kW)	2.1	3.2	4.2	5.3	6.3
Electrical supply	13A 230V	16A 230V	20A 230V	32A 230V	32A 230V

Assisted Service

KHBMW2+KAS2	KHBMW3+KAS3	KHBMW4+KAS4	KHBMW5+KAS5	KHBMW6+KAS6
Price	£4,812	£5,046	£5,620	£6,603
£7,074				
HBMW2+AS2	HBMW3+AS3	HBMW4+AS4	HBMW5+AS5	HBMW6+AS6
Price	£4,605	£4,462	£5,392	£6,344
£6,792				
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN
6/1 GN				
Length (mm)	825	1175	1525	1875
2225				
Depth (mm)	660	660	660	660
660				
Height above worktop (mm)	540	540	540	540
540				
Designline >	535	535	535	535
535				
Depth below worktop (mm)	220	220	220	220
220				
Drain connection depth (mm)	+125	+125	+125	+125
+125				
Weight (uncrated) (kg)	54	69	81	95
109				
Designline >	46	60	72	86
99				
Power (kW)	2.1	3.2	4.2	5.3
6.3				
Electrical supply	13A 230V	16A 230V	20A 230V	32A 230V
32A 230V				

* These models have controls fitted on operator side of gantry as standard. If controls are required on customer side i.e. for wall sited counters, please state 'controls to customer side' when ordering.

* These models have controls fitted on operator side of gantry as standard.

CERAN GLASS HOTPLATE

Kubus & Designline Drop-ins



Available in both Kubus or Designline model styles



DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk

Main Features

- > **KUBUS**
Self Help: Flat toughened glass sneeze guard profile. Assisted Service: Full height flat front & side glass sneeze guard profile. Both are designed to compliment other units within the Kubus range.
- > **DESIGNLINE:**
Self Help: Curved toughened glass sneeze guard and end glass profile. Assisted Service: Full height curved front & end glass sneeze guard profile. Both are designed to compliment other units within the Designline range.
- > Ceramic glass hotplate display surface for food presentation in flat bottomed oven to tableware dishes.
- > 'Touch safe' gantry mounted digital temperature display and eye level control panel (Operator side).
- > Base heat and top heat are separately controlled.
- > Top heat is variably controlled from a gantry mounted dimmer switch.
- > 24-hour operation as standard.

- > Superstructure in bright polished, satin steel and aluminium profile.
- > Supplied with concealed under counter control box on a 2m loom for connection to 13 Amp/16 Amp or 20 Amp supplies.

Special features

- > **Illumination**
Kubus: Product illumination/surface heat is provided from a rectangular profile gantry. Designline: Product illumination/surface heat is provided from an elliptical profile gantry.
- > Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.
- > Features 'tamper proof' temperature control facility.
- > Base heat output is thermostatically controlled from the gantry mounted control panel giving even heat spread.

Breakfast

Baked beans, tomatoes, bacon, sausage, black pudding, mushrooms, hash browns.

Lunch/dinner

Stews, curry, chilli dishes, sliced meats in gravy or sauce, pasta in sauce, vegetables, ribs with sauce, chicken portions.

Short term holding (15-20 mins)

Breakfast/ brunch
Omelettes, fried / boiled eggs, baked potatoes.

Lunch/dinner

Battered fish, chips / fries.

Food Display long term holding (2-4 hours)

Ceran Glass Hotplate

Self Help

Kubus Model	KHP2	KHP3	KHP4	KHP5	KHP6
Price	£3,690	£4,206	£4,764	£5,245	£5,733
Designline Model	HP2	HP3	HP4	HP5	HP6
Price	£3,515	£4,002	£4,535	£4,996	£5,458
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN	6/1 GN
Length (mm)	825	1175	1525	1875	2225
Depth (mm)	660	660	660	660	660
Height above worktop (mm)	Kubus > 540	540	540	540	540
	Designline > 535	535	535	535	535
Depth below worktop (mm)	92	92	92	92	92
Weight (uncrated) (kg)	Kubus > 51	60	69	78	87
	Designline > 46	55	64	73	82
Power (kW)	1.3	1.95	2.6	3.3	3.9
Electrical supply	13A 230V	13A 230V	13A 230V	16A 230V	20A 230V

Assisted Service

KHP2+KAS2	KHP3+KAS3	KHP4+KAS4	KHP5+KAS5	KHP6+KAS6
Price	£4,140	£4,694	£5,567	£6,367
	£6,963			
HP2+AS2	HP3+AS3	HP4+AS4	HP5+AS5	HP6+AS6
Price	£3,962	£4,493	£5,334	£6,115
	£6,889			
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN
	6/1 GN			
Length (mm)	825	1175	1525	1875
	2225			
Depth (mm)	660	660	660	660
	660			
Height above worktop (mm)	540	540	540	540
	540			
Depth below worktop (mm)	535	535	535	535
	535			
Weight (uncrated) (kg)	92	92	92	92
	92			
Weight (uncrated) (kg)	65	76	87	98
	109			
Power (kW)	57	67	78	89
	99			
Power (kW)	1.3	1.95	2.6	3.3
	3.9			
Electrical supply	13A 230V	13A 230V	13A 230V	16A 230V
	20A 230V			

* These models have controls fitted on operator side of gantry as standard. If controls are required on customer side i.e. for wall sited counters, please state 'controls to customer side' when ordering.

* These models have controls fitted on operator side of gantry as standard.

CERAN GLASS HOTPLATE & HEATED MID-SHELF

Kubus & Designline Drop-ins



Kubus Self Help

VERSATILITY AS STANDARD:
Two adjustable temperature heated display surfaces



Designline Self Help



Kubus Assisted Service



Designline Assisted Service

DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk

Main Features

- **KUBUS Self Help:** Flat toughened glass sneeze guard profile. Assisted Service: Full height flat front & side glass sneeze guard profile. Both are designed to compliment other units within the Kubus range.
- **DESIGNLINE: Self Help:** Curved toughened glass sneeze guard profile. Assisted Service: Full height curved front & end glass sneeze guard profile. Both are designed to compliment other units within the Designline range.
- Heated ceran glass surface for food presentation in flat bottomed dishes.
- 'Touch safe' gantry mounted digital temperature display and eye level control panel (operator side)
- Additional eye level heated mid shelf – ideal for plated meal presentation.

- Base heat and top heat are separately controlled.
- Top heat is variably controlled from 2 no.gantry mounted dimmer switches.
- 24-hour operation as standard.
- Superstructure in bright polished, satin steel and aluminium profile.
- Supplied with concealed under counter control box on a 2m loom for connection to 13 Amp/ 16 Amp/ 20 Amp/ or 32 Amp supplies.

Special features

- **Illumination**
Kubus: Product Illumination/surface heat is provided from a rectangular profile gantry.
Designline: Product Illumination/surface heat is provided from an elliptical profile gantry.
- Features tamper proof temperature control facility.
- Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.

- Base heat output is thermostatically controlled from the gantry mounted control panel giving even heat spread.

Food Display long term holding (2-4 hours)

Breakfast
Baked beans, tomatoes, bacon, sausage, black pudding, mushrooms, hash browns.

Lunch/dinner
Stews, curry, chilli dishes, sliced meats in gravy or sauce, pasta in sauce, vegetables (dry or in liquid), ribs with sauce, chicken portions.

Short term holding (15-20 mins)

Breakfast/ brunch
Omelettes, fried/ boiled eggs, baked potatoes.

Lunch/dinner
Battered fish, chips / fries, pizza.

Ceran Glass Hotplate & Heated Mid-shelf

Self Help

Kubus Model	KHP2PS	KHP3PS	KHP4PS	KHP5PS
Price	£5,748	£6,322	£6,541	£7,155
Designline Model	HP2PS	HP3PS	HP4PS	HP5PS
Price	£5,117	£5,685	£6,349	£6,915
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN
Length (mm)	825	1175	1525	1875
Depth (mm)	660	660	660	660
Height above worktop (mm)	Kubus > 714 Designline > 695	714 695	714 695	714 695
Depth below worktop (mm)	Kubus > 92 Designline > 220	92 220	92 220	92 220
Weight (uncrated) (kg)	Kubus > 66 Designline > 55	81 66	95 77	117 88
Power (kW)	1.9	2.9	3.8	4.8
Electrical supply	13A 230V	13A 230V	20A 230V	32A 230V

Assisted Service

KHP2PS+KAS2PS	KHP3PS+KAS3PS	KHP4PS+KAS4PS	KHP5PS+KAS5PS	
£5,911	£6,706	£7,246	£7,881	
-	HP3PS+AS3PS	HP4PS+AS4PS	-	
-	£6,072	£7,049	-	
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN
Length (mm)	825	1175	1525	1875
Depth (mm)	660	660	660	660
Height above worktop (mm)	714	714	714	714
Depth below worktop (mm)	92	92	92	92
Weight (uncrated) (kg)	72	89	106	130
Power (kW)	1.9	2.9	3.8	4.8
Electrical supply	13A 230V	13A 230V	20A 230V	32A 230V

* These models have controls fitted on operator side of gantry as standard. If controls are required on customer side i.e. for wall sited counters, please state 'controls to customer side' when ordering.

* These models have controls fitted on operator side of gantry as standard.

DRY HEAT BAIN MARIE 1/1 GN & CERAN GLASS HOTPLATE 1/1 GN

Kubus & Designline Drop-ins



DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk

Available in both Kubus or Designline model styles



Main Features

Dry heat bain marie 1/1 GN (KHBM1 & HBM1)

- > Self help / assisted service application.
- > Base heat is controlled via remotely connected digital control panel/ digital probe.
- > Superstructure in bright polished / satin steel & aluminium.
- > Control panel & fascia mounting plate on 2m loom for fitting in rear valance panel.
- > Features 'tamper proof' temperature control facility.
- > KHBM1 & HBM1 can accept 100-150mm deep food containers, either 1 x 1/1GN, 3 x 1/3 GN, or 1 x 2/3GN & 1 x 1/3GN, not supplied.
- > Display can accept ceran glass insert with lift up handle (option HINS2)
- > Display can accept raised solid steel spiked carvery insert (option CINS1)
- > Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.

Ceran glass hotplate 1/1Gn (KHP1 & HP1)

- > Self help / assisted service application.
- > For food presentation in flat bottom oven to tableware dishes.
- > Base heat is controlled via remotely connected digital control panel/ digital probe.
- > Superstructure in bright polished / satin steel & aluminium.
- > Control panel & fascia mounting plate on 2m loom for fitting in rear valance panel.
- > Features 'tamper proof' temperature control facility.
- > Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.

Food Display long term holding (2-4 hours)

Breakfast

Baked beans, tomatoes, bacon, sausage, black pudding, mushrooms, hash browns.

Lunch/dinner

Stews, curry, chilli dishes, sliced meats in gravy

or sauce, pasta in sauce, vegetables (dry or in liquid), ribs with sauce, chicken portions.

KHP1 & HP1 Lunch/dinner

Roast joints, poultry, large fish, processed meat joints.

Short term holding (15-20 mins)

Breakfast/ brunch

Omelettes, fried/ boiled eggs, baked potatoes.

Lunch/dinner

Battered fish, chips / fries, pizza.

Dry Heat Bain Marie 1/1 GN (KHBM1 & HBM1) & Ceran Glass Hotplate 1/1GN (KHP1 & HP1)

Kubus Model	KHBM1	KHP1
Price	£2,989	£3,000
Designline Model	HBM1	HP1
Price	£2,389	£2,925
Capacity	1/1 GN	1/1 GN
Length (mm)	475	475
Depth (mm)	660	660
Height above worktop (mm)	535	535
Depth below worktop (mm)	220	92
Weight (uncrated) (kg)	22	22
Power (kW)	1.0	1.0
Electrical supply	13A 230V	13A 230V

* Remote control panel on 2m electrical loom



Designline 1/1 GN Ceran Glass Hotplate Shown



Kubus 1/1 GN Ceran Glass Hotplate Shown

ASSISTED SERVICE HEATED DELI

Kubus & Designline Drop-ins



Kubus
Assisted Service

BETTER FOOD PRESENTATION:
Inclined base & hot shelf raises product to eye level



Designline
Assisted Service



DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk

Available in both Kubus or Designline model styles



Main Features

- > **KUBUS**
Flat full height front & side glass sneeze guard profile is designed to compliment other units within the Kubus range.
- > **DESIGNLINE**
Full height curved front & end glass sneeze guard profile is designed to compliment other units within the Designline range.
- > Assisted service application.
- > Heated inclined well for display of wrapped/unwrapped savoury products or food presented in flat bottomed dishes.
- > Heated stainless steel mid-shelf provides increased product display area.
- > Superstructure in bright polished steel and aluminium profile.
- > 'Touch safe' gantry mounted digital temperature display and eye level control panel (operator side)
- > Quartz mid-shelf and top heat are variably controlled from 2 no. gantry mounted dimmer switches.
- > 24-hour operation as standard.
- > Top heat is variably controlled from a gantry

mounted dimmer switch.

- > Supplied with concealed under counter control box on a 2m loom for connection to 13/20/32 Amp supply.
- > Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.
- > Tilting front glass sneeze screen mounted on locking hinge, for ease of cleaning.

Special features

- > **Illumination**
Kubus: Product Illumination/heat is provided from a rectangular profile gantry. and mid shelf.
Designline: Product Illumination/surface heat is provided from an elliptical profile gantry.
- > Features 'tamper proof' temperature control panel facility.
- > Base heat output is thermostatically controlled from the gantry mounted control panel giving even heat spread.

Food Display long term holding (2-4 hours)

Breakfast
Baked beans, tomatoes, bacon, sausage, black pudding, mushrooms, hash browns.

Lunch/dinner
Pies, pastries, sausage rolls, stews, curry, chilli dishes, sliced meats in gravy or sauce, pasta in sauce, vegetables, ribs with sauce, chicken portions.

Short term holding (15-20 mins)

Breakfast/ brunch
Toast/ panini, omelettes, fried/ boiled eggs, muffins, baked potatoes.

Lunch/dinner
Plate presented meals, hot baguettes, battered fish, chips / fries, pizza.

Assisted Service Heated Deli

Kubus Model	KHDL2	KHDL3	KHDL4	KHDL5
Price	£5,586	£6,024	£6,468	£7,457
Designline Model	HDL2	HDL3	HDL4	HDL5
Price	£5,317	£5,741	£6,160	£7,100
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN
Length (mm)	825	1175	1525	1875
Depth (mm)	660	660	660	660
Height above worktop (mm)	Kubus > 540 Designline > 535	540 535	540 535	540 535
Depth below worktop (mm)	191	191	191	191
Weight (uncrated) (kg)	Kubus > 90 Designline > 85	107 102	123 118	133 128
Power (kW)	1.9	2.9	3.8	4.8
Electrical supply	13A 230V	13A 230V	20A 230V	32A 230V

* These models have controls fitted on operator side of gantry as standard.



Designline Heated Deli Shown

SELF HELP DRY HEAT SOUP UNIT & HEATED GANTRIES

Kubus & Designline Drop-ins



Soup Unit

SUP1



Kubus

Self Help Heated Gantry

Self Help Heated Island Gantry



Designline

Self Help Heated Gantry

Self Help Heated Island Gantry



DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk

Available in both Kubus or Designline model styles

Option - QC1 Quartz Controller



Main Features (Soup Unit)

- > Dry heat bain marie supplied with 2 no. 4.5 litre (8 pint) s/steel soup containers & notched s/steel lids, supported in collars.
- > Removable steel drip tray/ soup bowl set down area.
- > Self help application.
- > Rear soup container in raised collar for improved customer access/ product presentation.
- > Designed to compliment other units within the range.
- > Base heat is controlled via remotely connected digital control panel/ digital probe.
- > Superstructure in bright polished and satin steel.
- > 24-hour operation as standard.

Special features

- > Remote control panel & elliptical fascia mounting plate on 2m loom for fitting in rear valance panel.
- > Features 'tamper proof' temperature control facility.

Main Features (Gantries)

- > **KUBUS**
Self Help: Flat toughened glass sneeze guard profile. Self Help Island: Double flat glass sneeze guard profile. Both are designed to compliment other units within the Kubus range.
- > **DESIGNLINE**
Self Help: Curved toughened glass sneeze guard profile. Self Help Island: Double curved glass sneeze guard. Both are designed to compliment other units within the Designline range.
- > Gantry creates a heated pass area to the work surface below.
- > Can be used as a heated over-structure for fabricated bain maries/ hotplates.
- > Heated quartz infra red lamps mounted in gantry superstructure, supporting a toughened sneeze protection glass screen.
- > Self help or assisted service heated gantry application.
- > Supplied with post fixing plates, bolts & 2m control loom for connection to customer's own control circuit (13A, 230V, 50Hz) or optional quartz dimmer switch controller (Option QC1).
- > Superstructure in bright polished steel and aluminium profile.

Special Features

- > **Illumination**
Kubus: Product Illumination/ surface heat is provided from a rectangular profile gantry. Designline: Product Illumination/ surface heat is provided from an elliptical profile gantry.
- > 24-hour operation as standard.

QC1 Quartz Controller (Option)

- > Dimmer control for heated gantry with elliptical profile mounting plate.
- > 2 metre loom and 13A plug supplied.

QC1 Quartz Controller

Model	QC1
Price	£430
Capacity	N/A
Length (mm)	220
Depth (mm)	175
Height above worktop (mm)	N/A
Weight (uncrated) (kg)	3
Power (kW)	N/A
Electrical supply	13A 230V

Self Help Dry Heat Soup Unit

Model	SUP1
Price	£1,419
Capacity	2 x 4.5 Litre
Length (mm)	345
Depth (mm)	660
Height above worktop (mm)	127
Depth below worktop (mm)	220
Weight (uncrated) (kg)	20
Power (kW)	0.5
Electrical supply	32A 230V

*Model includes 2 x 4.5lr soup containers

Self Help Heated Gantry

Kubus Model	KHG2	KHG3	KHG4	KHG5	KHG6
Price	£1,320	£1,392	£1,462	£1,533	£1,609
Designline Model	HG2	HG3	HG4	HG5	HG6
Price	£1,257	£1,326	£1,390	£1,462	£1,529
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN	6/1 GN
Length (mm)	Kubus > 795 Designline > 800	1145 1150	1495 1500	1845 1850	2195 2200
Depth (mm)	Kubus > 474 Designline > 377	474 377	474 377	474 377	474 377
Height above worktop (mm)	Kubus > 540 Designline > 535	540 535	540 535	540 535	540 535
Weight (uncrated) (kg)	Kubus > 15 Designline > 10	18 13	22 17	26 21	30 25
Power (kW)	0.6	0.9	1.2	1.5	1.8
Electrical supply	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V

Self Help Heated Island Gantry

KHG2	KHG3	KHG4	KHG5	KHG6
£1,378	£1,480	£1,543	£1,675	£1,946
-	HIG3	HIG4	-	-
-	£1,449	£1,514	-	-
2/1 GN	3/1 GN	4/1 GN	5/1 GN	6/1 GN
795	1145	1495	1845	2195
-	1150	1500	-	-
602	602	602	602	602
-	550	550	-	-
540	540	540	540	540
-	535	535	-	-
20	23	27	31	36
-	13	17	-	-
0.6	0.9	1.2	1.5	1.8
13A 230V	13A 230V	13A 230V	13A 230V	13A 230V

CHILLED HYDROCARBON (HT)

Environmentally Friendly

WHAT'S IT ALL ABOUT?



CED's Chilled Hydrocarbon system... kinder to the environment & your budget

For a reduced carbon footprint, the full range of CED chilled drop in displays and patisseries are now supplied in our Hydrocarbon gas technology system. A pioneering drop in industry feature, Designline & Kubus HT displays use a highly efficient naturally occurring refrigerant gas, within a leak tested, hermetically sealed range of R290 condensing units.

These units use less electricity, run cooler and so reduce heat output into the servery, whilst extending the condensing unit lifespan.



**KINDER
TO THE
ENVIRONMENT**



**ZERO
OZONE
DEPLETING
COOLANT**



**CONFORMS TO
THE HIGHEST
STANDARDS**



**UP TO 37%
LOWER
RUNNING
COSTS**



**LOWER
CARBON
FOOTPRINT**



**Made in
the UK**

DESIGNLINE & KUBUS HT DISPLAYS FEATURE:

- › Zero Ozone Depletion Potential
- › Low global warming potential.
- › Sustainably sourced product packaging used for all units.
- › Long life, low energy LED lighting (ecologically free of mercury, lead & phosphor) as standard.
- › Fully supported in the field by qualified service team.
- › Independently CE approved



COLD WELL (HT)

Kubus & Designline Drop-ins



Available in both Kubus or Designline model styles



DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk

Main Features

- › **KUBUS Self Help:** Flat toughened glass sneeze guard profile. Assisted Service: Full height flat front & side glass sneeze guard profile. Both are designed to compliment other units within the Kubus range.
- › **DESIGNLINE Self Help:** Curved toughened glass sneeze guard profile. Assisted Service: Full height curved front & end glass sneeze guard profile. Both are designed to compliment other units within the Designline range.
- › Cold fan blown well display features integral energy efficient chilled hydrocarbon refrigeration (HT).
- › Features eye-level gantry mounted digital temperature display and control panel (operator side)
- › Can achieve temperatures of 0°C to 5°C (max 27°C ambient 55% relative humidity).
- › Illumination
Kubus: Product Illumination is from diffused LED lighting (4000 Kelvin) in a rectangular profile gantry.
Designline: Product Illumination is from diffused LED lighting (4000 Kelvin) in an elliptical profile gantry.
- › Integral automatic condensate water evaporation eliminates the need for site drainage.
- › 24-hour operation as standard.
- › Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.
- › Superstructure in bright polished steel and aluminium profile
- › Supplied with 2 m lead for connection to a single 13 Amp socket (13A 230V 50 Hz).
- › Optional non standard airflow available.

Special features

- › Refrigeration condensing unit is housed in an under slung self contained cradle.

- › Features 'tamper proof' temperature control facility.
- › Modular removable deck plate system for easier cleaning and maintenance.

Food Display Examples

Food (Drinks Area)
Still & carbonated, bottled, canned or carton, water, dairy, lemonade, wine, beer, lager, fruit juice & health drinks.

Food (Deck Area)
Wrapped sandwiches, baguettes, rolls, barm cakes, salad, pasta, cheese snacks, cream cakes & pastries, cakes, yoghurt, fruit in juice & fruit.
* Unwrapped product displayed may require the provision of sneeze guard protection (by others) .*

Cold Well (HT) - R290 Refrigerant

Self Help

Kubus Model	KCW2HT	KCW3HT	KCW4HT	KCW5HT	KCW6HT
Price	£6,217	£6,601	£6,812	£7,503	£8,411
Designline Model	CW2HT	CW3HT	CW4HT	CW5HT	CW6HT
Price	£5,920	£6,284	£6,485	£7,139	£7,685
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN	6/1 GN
Length (mm)	825	1175	1525	1875	2225
Depth (mm)	660	660	660	660	660
Height above worktop (mm)	Kubus > 540	540	540	540	540
	Designline > 535	535	535	535	535
Depth below worktop (mm)	677	677	677	677	677
Weight (uncrated) (kg)	Kubus > 96	116	136	149	162
	Designline > 94	111	131	144	160
Power (kW)	1.22	1.22	1.46	1.66	1.73
Electrical supply	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V

Assisted Service

KCW2HT+KAS2	KCW3HT+KAS3	KCW4HT+KAS4	KCW5HT+KAS5	KCW6HT+KAS6	
Price	£6,669	£7,029	£7,613	£8,621	£9,642
CW2HT+AS2	CW3HT+AS3	CW4HT+AS4	CW5HT+AS5	CW6HT+AS6	
Price	£6,369	£6,773	£7,284	£8,257	£8,916
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN	6/1 GN
Length (mm)	825	1175	1525	1875	2225
Depth (mm)	660	660	660	660	660
Height above worktop (mm)	540	540	540	540	540
	535	535	535	535	535
Depth below worktop (mm)	677	677	677	677	677
Weight (uncrated) (kg)	110	132	154	169	184
	105	123	145	160	177
Power (kW)	1.22	1.22	1.46	1.66	1.73
Electrical supply	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V

* These models have controls fitted on operator side of gantry as standard. If controls are required on customer side i.e. for wall sited counters, please state 'controls to customer side' when ordering.

* These models have controls fitted on operator side of gantry as standard.

SELF HELP COLD ISLAND WELL (HT)

Kubus & Designline Drop-ins



Kubus
Cold Island Well (HT)



Designline
Cold Island Well (HT)

ACCESS FROM BOTH SIDES:
Perfect as a central salad station



DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk

Available in both Kubus or Designline model styles



Main Features

- **KUBUS**
Double edged flat toughened island glass profile is designed to compliment other units within the Kubus range.
- **DESIGNLINE**
Double curved toughened glass profile is designed to compliment other units within the Designline range.
- Self help application.
- Cold fan blown well display features integral energy Self help application.
- Features eye-level gantry mounted digital temperature display and control panel (operator side)
- Cold fan blown well display features integral energy efficient chilled hydrocarbon refrigeration (HT).
- Can achieve temperatures of 0°C to 5°C (max 27°C ambient 55% relative humidity).
- Illumination

- Kubus: Product Illumination is from diffused LED lighting (4000 Kelvin) in a rectangular profile gantry.
Designline: Product Illumination is from diffused LED lighting (4000 Kelvin) in an elliptical profile gantry.
- Integral automatic condensate water evaporation eliminates the need for site drainage.
 - Superstructure in bright polished steel and aluminium profile.
 - 24-hour operation as standard.
 - Non standard airflow options available.
 - Supplied with 2m lead for connection to a single 13 Amp socket (13A 230V 50 Hz).

Special features

- Refrigeration condensing unit is housed in an underslung self contained cradle.
- Modular removable deck plate system for easier cleaning and maintenance.
- Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.
- Features 'tamper proof' temperature control facility.

Food Display Examples

Food (Drinks Area)

Still & carbonated, bottled, canned or carton, water, dairy, lemonade, wine, beer, lager, fruit juice & health drinks.

Food (Deck Area)

Sandwiches, baguettes, rolls, barm cakes, salad, pasta, cheese snacks, cream cakes & pastries, cakes, yoghurt, cereals, fruit in juice & fruit.

Self Help Cold Well (HT) - R290 Refrigerant

Kubus Model	KCIW2HT	KCIW3HT	KCIW4HT	KCIW5HT	KCIW6HT
Price	£6,547	£7,055	£7,731	£8,364	£8,750
Designline Model	-	CIW3HT	CIW4HT	-	CIW6HT
Price	-	£6,712	£7,361	-	£8,313
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN	6/1 GN
Length (mm)	Kubus > 825 Designline > -	1175	1525	1875	2225
Depth (mm)	660	660	660	660	660
Height above worktop (mm)	Kubus > 540 Designline > -	540	540	540	540
Depth below worktop (mm)	677	677	677	677	677
Weight (uncrated) (kg)	Kubus > 96 Designline > -	116	136	156	162
Power (kW)	1.22	1.22	1.46	1.66	1.73
Electrical supply	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V


* These models have controls fitted on operator side of gantry as standard. If controls are required on customer side i.e. please state 'controls to customer side' when ordering.




Kubus Cold Island Well Shown

COLD TIERED WELL (HT)

Kubus & Designline Drop-ins

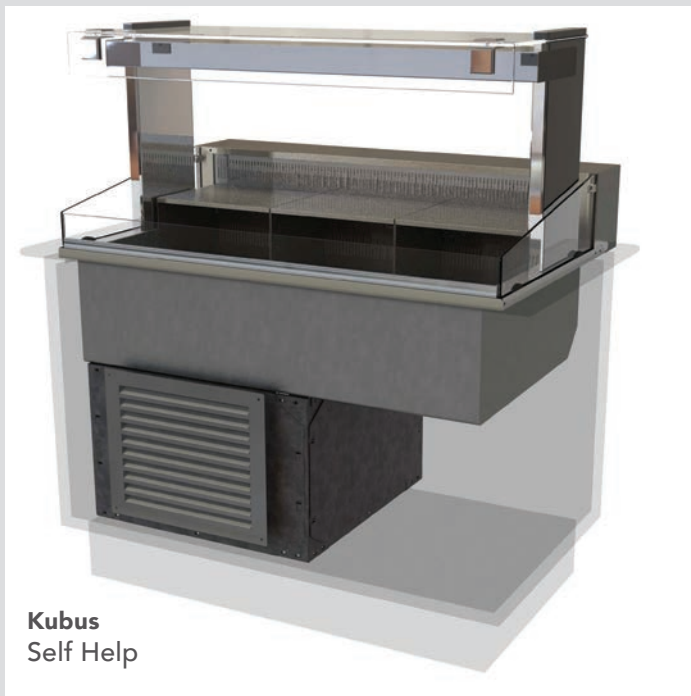

Kubus
Self Help

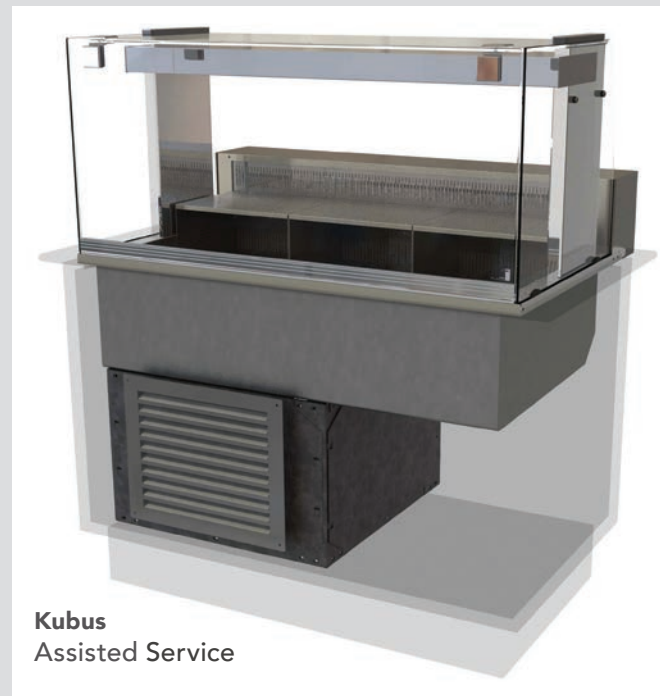

Kubus
Assisted Service



DOWNLOAD ALL
TECHNICAL DRAWINGS
from www.cedfabsltd.co.uk

Available in Kubus style only



Main Features

- Self Help: Flat toughened glass sneeze guard and low height side wiew glass profile. Assisted Service: Full height flat front & side glass sneeze guard profile. Both are designed to compliment other units within the Kubus range.
- Cold fan blown well unit features integral energy efficient chilled hydrocarbon refrigeration (HT).
- Raised rear steel shelf for food preparation of sandwiches etc.
- Removable raised steel triverts for two tiered chilled product presentation in well area.
- Features eye-level gantry mounted digital temperature display and control panel (operator side).
- Can achieve temperatures of 0°C to 5°C (max 27°C ambient 55% relative humidity).
- Superstructure in bright polished steel and aluminium profile.
- Product Illumination is from diffused LED

lighting (4000 Kelvin) in a rectangular profile gantry.

- Integral automatic condensate water evaporation eliminates the need for site drainage.
- Supplied with 2 m lead for connection to a single 13 Amp socket (13A 230V 50 Hz).
- 24-hour operation as standard.
- Optional 1/1 GN polyethylene cutting board for sandwich preparation, can be used in multiples. (Option KCB1)

Special features

- Refrigeration condensing unit is housed in an under slung self contained cradle.
- Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.
- Features 'tamper proof temperature control facility.
- Modular removable deck plate system for easier cleaning and maintenance.

Food Display Examples

Food (Drinks Area)
Still & carbonated, bottled, canned or carton, water, dairy, lemonade, wine, beer, lager, fruit juice & health drinks.

Food (Deck Area)
Pies, pasties, sausage rolls & cooked meats, sandwich fillings, baked potato fillings, salad items & cheese, sandwiches, baguettes, rolls, barm cakes, salad, pasta, cheese snacks, cream cakes & pastries, cakes, yoghurt, fruit in juice & fruit.

Food (Shelving Area)
Danish pastries, muffins, doughnuts, fruit cake, biscuits, fruit, chocolate, crackers, rice cakes, tacos, crisps, nuts.

* Sandwiches, baguettes, rolls, barm cakes & cheese subject to local health regulations re: display times.


Cold Tiered Well (HT) - R290 Refrigerant

Self Help

Kubus Model	Self Help			Assisted Service		
	KCTW2HT	KCTW3HT	KCTW4HT	KCTW2HT +KAS2	KCTW3HT +KAS5	KCTW4HT +KAS4
Price	£6,749	£7,140	£7,629	£7,197	£7,629	£8,432
Capacity	2/1 GN	3/1 GN	4/1 GN	2/1 GN	3/1 GN	4/1 GN
Length (mm)	825	1175	1525	825	1175	1525
Depth (mm)	784	784	784	784	784	784
Height above worktop (mm)	540	540	540	540	540	540
Depth below worktop (mm)	677	677	677	677	677	677
Weight (uncrated) (kg)	108	129	158	119	142	172
Power (kW)	1.22	1.22	1.46	1.22	1.22	1.46
Electrical supply	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V



* These models have controls fitted to operator side of gantry. If controls are required on customer side, please state 'controls to customer side' when ordering.

* This model has controls fitted to operator side of gantry.

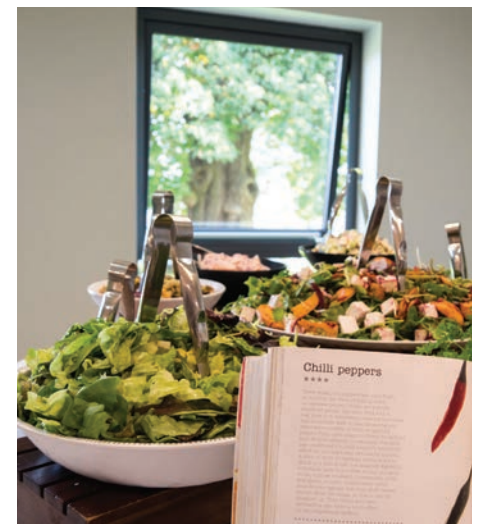

COLD MULTIDECK (REAR DOORS/FIXED BACK)(HT)

Kubus & Designline Drop-ins

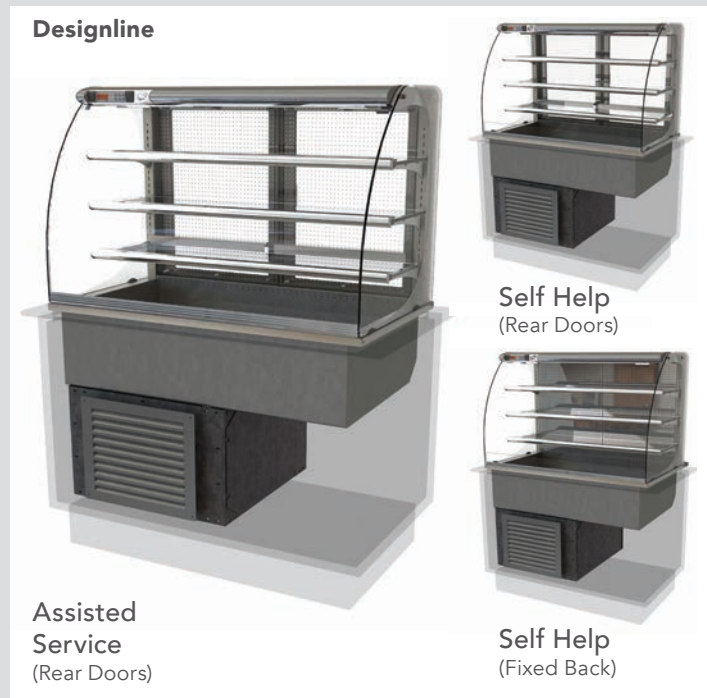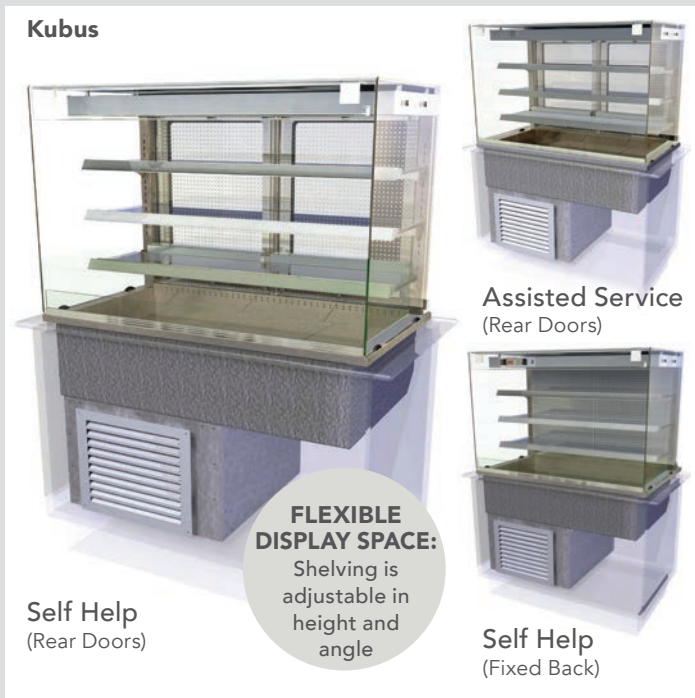

DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk

Available in both Kubus or Designline model styles



Main Features

- KUBUS:**
 Self Help: Flat toughened glass sneeze guard profile. Assisted Service: Full height flat front & end glass sneeze guard profile. Both are designed to compliment other units within the Kubus range.
- DESIGNLINE:**
 Self Help: Curved toughened end glass profile. Assisted Service: Full height curved front & end glass sneeze guard profile. Both are designed to compliment other units within the Designline range.
- Cold multideck display features integral energy efficient chilled hydrocarbon refrigeration (HT)
- 3 tier toughened cold glass shelving, adjustable in both height and angle, for increased product display area.
- Additional cold well area typically used as bottle storage.
- Can achieve temperatures of 0°C to 5°C (max 27°C ambient 55% relative humidity).
- Features eye-level gantry mounted digital temperature display and control panel.
- Illumination**
 Kubus: From diffused LED lighting (4000 Kelvin) in a rectangular profile gantry.
 Designline: From diffused LED lighting (4000 Kelvin) in an elliptical profile gantry.
- Integral automatic condensate water evaporation eliminates the need for site drainage.
- Rear Door Models: Rear hinged double glazed doors offer easier restocking access and visual stock checking.
- Fixed Back Models: Bright polished steel rear back panel for typical use in wall sited situation.
- Fixed Back Models: Air outlet via rear worktop mounted grill.
- Superstructure in bright polished steel and aluminium profile.
- Supplied with 2m lead for connection to a single 13 Amp socket (13A 230V 50 Hz).
- 24-hour operation as standard.

Special features

- Refrigeration condensing unit is housed in an underslung self contained cradle.
- Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.
- Modular removable deck plate system for easier cleaning and maintenance.
- Features 'tamper proof' temperature control facility.
- 40mm tall 'point of sale' display/ ticket strips are fitted as standard.

Food Display Examples

Drinks (Deck Area)

Still & carbonated, bottled, canned or carton, water, dairy, lemonade, wine, beer, lager, fruit juice & health drinks.

Food (Deck and Shelving Area)

Sandwiches, baguettes, rolls, barm cakes, salad, pasta, cheese snacks, cream cakes & pastries, cakes, yoghurt, cereals, fruit in juice & fruit.

Cold Multideck (HT) - R290 Refrigerant

Self Help (Rear Doors)					Assisted Service (Rear Doors)				Self help (Fixed Back)*			
Kubus Model **	KMDR2HT	KMDR3HT	KMDR4HT	KMDR5HT	KMDR2ASHT	KMDR3ASHT	KMDR4ASHT	KMDR5ASHT	KMDF2HT	KMDF3HT	KMDF4HT	KMDF5HT
Price	£8,719	£9,339	£10,536	£11,056	£9,486	£10,174	£11,434	£11,678	£8,453	£9,092	£10,291	£10,831
Designline Model*	MDR2ASHT	MDR3ASHT	MDR4ASHT	MDR5ASHT	MDR2ASHT	MDR3ASHT	MDR4ASHT	MDR5ASHT	MDF2HT	MDF3HT	MDF4HT	MDF5HT
Price	£8,423	£9,022	£10,182	£10,628	£9,166	£9,829	£11,045	£11,368	£8,164	£8,783	£9,942	£10,387
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN	2/1 GN	3/1 GN	4/1 GN	5/1 GN	2/1 GN	3/1 GN	4/1 GN	5/1 GN
Length (mm)	825	1175	1525	1875	825	1175	1525	1875	825	1175	1525	1875
Depth (mm)	660	660	660	660	660	660	660	660	660+75*	660+75*	660+75*	660+75*
Height above worktop (mm)	Kubus > 775	775	775	775	775	775	775	775	775	775	775	775
	Designline > 750	750	750	750	750	750	750	750	750	750	750	750
Depth below worktop (mm)	677	677	677	677	677	677	677	677	677	677	677	677
Weight (uncrated) (kg)	Kubus > 150	170	212	240	160	189	222	249	138	158	200	238
	Designline > 145	165	207	238	155	175	217	244	133	153	195	238
Power (kW)	1.65	1.73	1.73	2.2	1.73	1.74	1.81	2.2	1.65	1.73	1.73	2.2
Electrical supply	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V

* Controls to customer side

** Controls to operator side

*75mm deep removable rear worktop grill/flue (Air out) for use in a wall sited counter.

* Controls to customer side

COLD MULTIDECK - ROLLER SHUTTER (HT)

Kubus & Designline Drop-ins



Kubus
Self Help
(Rear Doors)



Kubus
Self Help
(Fixed Back)

**SECURITY
OVERNIGHT:**
Fully lockable
display



DOWNLOAD ALL
TECHNICAL DRAWINGS
from www.cedfabsltd.co.uk

Available in Kubus style only



Main Features

- Flat stainless steel profile houses intergral lockable roller shutter.
- Self help application.
- A high security addition to the Kubus range.
- Cold multideck display features integral energy efficient chilled hydrocarbon refrigeration (HT).
- 3 tier toughened cold glass shelving, adjustable in both height and angle, for increased product display area.
- Additional cold well area typically used as bottle storage.
- Can achieve temperatures of 0°C to 5°C (max 27°C ambient 55% relative humidity).
- Features eye-level gantry mounted digital temperature display and control panel (operator side).
- Rear Door Models: Rear hinged lockable double glazed doors offer easier restocking access and visual stock checking.
- Fixed Back Models: Bright polished steel rear back panel. For typical use in wall sited situation.
- Fixed Back Models: Air outlet via rear worktop mounted grill.
- Product Illumination is from diffused LED lighting (4000 Kelvin) in a rectangular profile gantry.
- Integral automatic condensate water evaporation eliminates the need for site drainage.
- Superstructure in satin polished steel and aluminium profile.
- Double glazed glass side viewing panels for improved merchandising.
- 24-hour operation as standard.
- Supplied with 2m lead for connection to a single 13 Amp socket (13A 230V 50 Hz).



**Made in
the UK**



Special features

- Refrigeration condensing unit is housed in an under slung self contained cradle.
- Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.
- Features 'tamper proof temperature control facility.
- Modular removable deck plate system for easier cleaning and maintenance.

Food Display Examples

Food (Deck Area)
Still & carbonated, bottled, canned or carton, water, dairy, lemonade, wine, beer, lager, fruit juice & health drinks.

Food (Deck & Shelving Area)
Sandwiches, baguettes, rolls, barm cakes, salad, pasta, cheese snacks, cream cakes & pastries, cakes, yoghurt, cereals, fruit in juice & fruit.

Cold Multideck - Roller Shutter (HT) - R290 Refrigerant

Rear Doors

Kubus Model	KMDR3RSHT	KMDR4RSHT
Price	£11,385	£12,551
Capacity	3/1 GN	4/1 GN
Length (mm)	1188	1538
Depth (mm)	711	711
Height above worktop (mm)	964	964
Depth below worktop (mm)	677	677
Weight (uncrated) (kg)	210	252
Power (kW)	1.73	1.73
Electrical supply	13A 230V	13A 230V

* These models have controls fitted to operator side of gantry.

Fixed Back

Kubus Model	KMDF3RSHT	KMDF4RSHT
Price	£11,140	£12,306
Capacity	3/1 GN	4/1 GN
Length (mm)	1188	1538
Depth (mm)	711+75*	711+75*
Height above worktop (mm)	964	964
Depth below worktop (mm)	677	677
Weight (uncrated) (kg)	210	252
Power (kW)	1.73	1.73
Electrical supply	13A 230V	13A 230V

* Control panel to 'customer side'.

* 75mm removable rear worktop grill / flue (air out) for use in a wall sited counter.

COLD DELI (HT)

Kubus & Designline Drop-ins



Kubus
Self Help

PRACTICAL DESIGN:
Sandwich preparation shelf to rear



Available in both Kubus or Designline model styles



Designline
Self Help



Kubus
Assisted Service



Designline
Assisted Service

DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk

Main Features

- KUBUS:**
Self Help: Flat toughened glass sneeze guard and side glass profile.
Assisted Service: Full height flat front & side glass sneeze guard profile.
 Both are designed to compliment other units within the Kubus range.
 - DESIGNLINE**
Self Help: Curved toughened glass sneeze guard and end glass profile.
Assisted Service: Full height curved front & end glass sneeze guard profile.
 Both are designed to compliment other units within the Designline range.
 - Toughened flat glass ambient mid shelf increases product display diversity.
 - Cold fan blown well unit features integral energy efficient chilled hydrocarbon refrigeration (HT).
 - Rear steel shelf for food preparation of sandwiches, etc.
 - Features eye-level gantry mounted digital temperature display and control panel (operator side).
 - Can achieve temperatures of 0°C to 5°C (max 27°C ambient 55% relative humidity).
 - Superstructure in bright polished steel and aluminium profile.
 - Illumination**
 Kubus: Product Illumination is from diffused LED lighting (4000 Kelvin) in a rectangular profile gantry.
 Designline: Product Illumination is from diffused LED lighting (4000 Kelvin) in an elliptical profile gantry.
 - Integral automatic condensate water evaporation eliminates the need for site drainage.
 - Supplied with 2 m lead for connection to a single 13 Amp socket (13A 230V 50 Hz).
 - 24-hour operation as standard.
 - Optional 1/1 GN polyethylene cutting board for sandwich preparation, can be used in multiples. (Kubus Option KCB1, Designline Option CB1)
- Special features**
- Refrigeration condensing unit is housed in an under slung self contained cradle.
 - Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.
 - Features 'tamper proof temperature control facility.
 - Modular removable deck plate system for easier cleaning and maintenance.

Food Display Examples

Food (Drinks Area)
Still & carbonated, bottled, canned or carton, water, dairy, lemonade, wine, beer, lager, fruit juice & health drinks.

Food (Deck Area)
Pies, pasties, sausage rolls & cooked meats, sandwich fillings, baked potato fillings, salad items & cheese, sandwiches, baguettes, rolls, barm cakes, salad, pasta, cheese snacks, cream cakes & pastries, cakes, yoghurt, fruit in juice & fruit.

Food (Shelving Area)
Danish pastries, muffins, doughnuts, fruit cake, biscuits, fruit, chocolate, crackers, rice cakes, tacos, crisps, nuts.

* Sandwiches, baguettes, rolls, barm cakes & cheese subject to local health regulations re: display times.

Cold Deli (HT) R290 Refrigerant

Self Help

Kubus Model	KCDLSH2HT	KCDLSH3HT	KCDLSH4HT	KCDLSH5HT	KCDLSH6HT
Price	£7,422	£7,838	£8,231	£8,979	£9,067
Designline Model	CDLSH2HT	CDLSH3HT	CDLSH4HT	CDLSH5HT	CDLSH6HT
Price	£7,060	£7,458	£7,830	£8,540	£8,920
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN	6/1 GN
Length (mm)	825	1175	1525	1875	2225
Depth (mm)	784	784	784	784	784
Height above worktop (mm)	Kubus > 540	540	540	540	540
	Designline > 535	535	535	535	535
Depth below worktop (mm)	677	677	677	677	677
Weight (uncrated) (kg)	Kubus > 107	127	153	170	188
	Designline > 102	123	149	166	180
Power (kW)	1.22	1.22	1.46	1.66	1.73
Electrical supply	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V

Assisted Service

KCDL2HT	KCDL3HT	KCDL4HT	KCDL5HT	KCDL6HT
Price	£7,550	£7,970	£8,398	£9,166
CDL2HT	CDL3HT	CDL4HT	CDL5HT	CDL6HT
Price	£7,185	£7,590	£7,991	£8,724
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN
Length (mm)	825	1175	1525	1875
Depth (mm)	784	784	784	784
Height above worktop (mm)	540	540	540	540
	535	535	535	535
Depth below worktop (mm)	677	677	677	677
Weight (uncrated) (kg)	111	133	161	180
	106	128	156	175
Power (kW)	1.22	1.22	1.46	1.66
Electrical supply	13A 230V	13A 230V	13A 230V	13A 230V

* These models have controls fitted to operator side of gantry. If controls are required on customer side, please state 'controls to customer side' when ordering.

* These models have controls fitted to operator side of gantry.

COLD MULTI LEVEL DELI (HT)

Kubus & Designline Drop-ins



DOWNLOAD ALL
TECHNICAL DRAWINGS
from www.cedfabsltd.co.uk

Available in both Kubus
or Designline model styles



Main Features

- › KUBUS:
Flat glass profile is designed to compliment other units within the Kubus range.
- › DESIGNLINE
Curved glass profile is designed to compliment other units within the Designline range.
- › Cold fan blown well unit features integral energy efficient chilled hydrocarbon refrigeration (HT).
- › Assisted service application.
- › Superstructure supports a toughened full height curved glass sneeze screen & side glass.
- › Shelving
Kubus: 2 no. toughened flat glass ambient mid shelves increase product display diversity.
Designline: 2 no. toughened curved glass ambient mid shelves increase product display diversity.
- › Rear steel sandwich preparation shelf for food preparation.
- › Features eye-level gantry mounted digital temperature display and control panel

(operator side).

- › Can achieve temperatures of 0°C to 5°C (max 27°C ambient 55% relative humidity).
- › Superstructure in bright polished steel and aluminium profile.
- › Illumination
Kubus: Product Illumination is from diffused LED lighting (4000 Kelvin) in a rectangular profile gantry.
Designline: Product Illumination is from diffused LED lighting (4000 Kelvin) in an elliptical profile gantry.
- › Integral automatic condensate water evaporation eliminates the need for site drainage.
- › Supplied with 2 m lead for connection to a single 13 Amp socket (13A 230V 50 Hz).
- › 24-hour operation as standard.

Special features

- › Refrigeration condensing unit is housed in an under slung self contained cradle.

- › Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.
- › Features tamper proof temperature control facility.
- › Modular removable deck plate system for easier cleaning and maintenance.

Food Display Examples

Drinks (Deck Area)
Still & carbonated, bottled, canned or carton, water, dairy, lemonade, wine, beer, lager, fruit juice & health drinks.

Food (Deck Area)
Pies, pasties, sausage rolls & cooked meats, sandwich fillings, baked potato fillings, salad items & cheese, sandwiches, baguettes, rolls, barm cakes, salad, pasta, cheese snacks, cream cakes & pastries, cakes, yoghurt, fruit in juice & fruit.

Food (Shelving Area)
Danish pastries, muffins, doughnuts, fruit cake, biscuits, fruit, chocolate, crackers, rice cakes, tacos, crisps, nuts.

*Sandwiches, baguettes, rolls, barm cakes & cheese subject to local health regulations re: display times.

Cold Multi Level Deli (HT) R290 Refrigerant.

Assisted Service

Kubus Model	KCMDL2HT	KCMDL3HT	KCMDL4HT	KCMDL5HT
Price	£7,726	£8,149	£8,582	£9,352
Designline Model	-	CMDL3HT	CMDL4HT	-
Price	-	£7,756	£8,164	-
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN
Length (mm)	825	1175	1525	1875
Depth (mm)	784	784	784	784
Height above worktop (mm)	Kubus > 700	700	700	700
	Designline > -	695	695	-
Depth below worktop (mm)	677	677	677	677
Weight (uncrated) (kg)	Kubus > 127	157	176	196
	Designline > -	152	170	-
Power (kW)	1.22	1.22	1.46	1.66
Electrical supply	13A 230V	13A 230V	13A 230V	13A 230V

*Gantry controls are fitted in the operator side of the display.



COLD TIERED DELI (HT)

Kubus & Designline Drop-ins



Designline
Self Help Cold Tiered Deli

TWO TIER PRESENTATION:
With removable trivet stands



Insitu Designline
Self Help Cold Tiered Deli

Available in Designline only



Cold Tiered Deli Main Features

- > Curved glass profile is designed to compliment other units within the range.
- > Cold fan blown well display features integral energy efficient chilled hydrocarbon refrigeration (HT).
- > Assisted service application with sliding acrylic doors for rear loading access.
- > Superstructure supports a full height toughened curved glass screen & profiled end glass.
- > Raised rear steel preparation shelf for food preparation of sandwiches, fillings etc.
- > Removable tiered steel trivets for multi level chilled product presentation in well area.
- > Features eye-level gantry mounted digital temperature display and control panel (operator side).
- > Can achieve temperatures of 0°C to 5°C (max 27°C ambient 55% relative humidity).
- > Superstructure in bright polished steel and aluminium profile.
- > Product illumination is from diffused LED lighting (4000 Kelvin) in an elliptical profile gantry.
- > Integral automatic condensate water evaporation eliminates the need for site drainage.
- > Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.
- > 24-hour operation as standard.

Special features

- > Refrigeration condensing unit is housed in an under slung self contained cradle.
- > Supplied with 2 m lead for connection to a single 13 Amp socket (13A 230V 50 Hz).
- > Features 'tamper proof' temperature control facility.
- > Modular removable deck plate system for easier cleaning and maintenance.

Food Display Examples

Drinks
Still & carbonated, bottled, canned or carton, water, dairy, lemonade, wine, beer, lager, fruit juice & health drinks.

Food (Deck Area)
Sandwiches, baguettes, rolls, barm cakes salad, pasta, cheese snacks, cream cakes & pastries, cakes, yoghurt, fruit in juice & fruit.

Cold Tiered Deli (HT) R290 Refrigerant

Assisted Service

Designline Model	CTD2HT	CTD3HT	CTD4HT
Price	£7,904	£8,291	£8,688
Capacity	2/1 GN	3/1 GN	4/1 GN
Length (mm)	825	1175	1525
Depth (mm)	784	784	784
Height above worktop (mm)	535	535	535
Depth below worktop (mm)	677	677	677
Weight (uncrated) (kg)	106	128	156
Power (kW)	1.22	1.22	1.46
Electrical supply	13A 230V	13A 230V	13A 230V

*Gantry controls are fitted to the operator side of the display.



DOWNLOAD ALL
TECHNICAL DRAWINGS
from www.cedfabsltd.co.uk

COLD DISPLAYS (NO GANTRY) (HT)

Kubus & Designline Drop-ins

Cold Well (No Gantry) (HT)



Self Help/Assisted Service

Main Features

- Chilled, fan blown well with no gantry superstructure, for the display of wrapped/ bottled product.
- Self help or assisted service application.
- Allows a bespoke UV bonded glass gantry or other type gantry superstructure to be fitted over the display (by others).
- 24-hour operation as standard.
- Features remote digital temperature display, control panel and mounting plate on 2M electrical loom.
- Can achieve temperatures of 0°C to 5°C (max 27°C ambient 55% relative humidity).
- Integral automatic condensate water evaporation eliminates the need for site drainage.

- Cold unit features integral energy efficient chilled hydrocarbon refrigeration (HT).
- Features 'tamper proof' locking temperature control facility.
- Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.

**** Unwrapped product displayed may require the provision of sneeze guard protection (by others) ****

Special features

- Refrigeration condensing unit is housed in an underslung self contained cradle.
- Modular removable deck plate system for easier cleaning and maintenance.
- Optional compatibility to Dixell & Modbus RTU network store food monitoring systems.
- Features 'tamper proof' temperature control facility.

Cold Well (No Gantry) (HT) R290 Refrigerant

Model	CW2NGHT	CW3NGHT	CW4NGHT	CW5NGHT	CW6NGHT
Price	£4,946	£5,294	£5,694	£6,287	£6,959
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN	6/1 GN
Length (mm)	825	1175	1525	1875	2225
Depth (mm)	660	660	660	660	660
Height above worktop (mm)	25	25	25	25	25
Depth below worktop (mm)	677	677	677	677	677
Weight (uncrated) (kg)	84	98	104	123	139
Power (kW)	1.22	1.22	1.44	1.65	1.73
Electrical supply	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V



Food Display Examples


Food (Drinks Area)
Still & carbonated, bottled, canned or carton, water, dairy, lemonade, wine, beer, lager, fruit juice & health drinks.

Food (Deck Area)
Wrapped sandwiches, baguettes, rolls, barm cakes salad, pasta, cheese snacks, cream cakes & pastries, cakes, yoghurt, fruit in juice & fruit *
Unwrapped product displayed may require the provision of sneeze guard protection (by others) *

* These models have a remote mounted control panel, fitted on a 2m electrical loom, for site fitting by others.

HEATED DISPLAYS (NO GANTRY)

Kubus & Designline Drop-ins

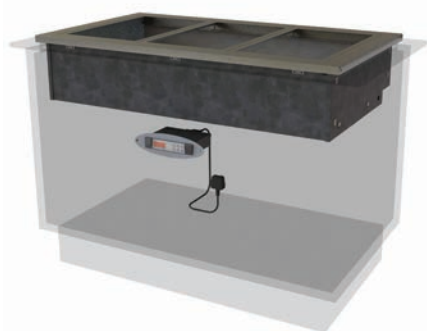

Dry Heat Bain Marie (No Gantry)



Ceran Glass Hotplate (No Gantry)

Heated (No Gantry) Models

Dry Heat Bain Marie Model	HBM1NG	HBM2NG	HBM3NG	HBM4NG	HBM5NG	HBM6NG
Price	£2,331	£2,711	£3,091	£3,505	£3,972	£4,179
Ceran Glass Hotplate Model	HP1NG	HP2NG	HP3NG	HP4NG	HP5NG	HP6NG
Price	£2,592	£3,101	£3,627	£4,237	£4,713	£4,895
Capacity	1/1 GN	2/1 GN	3/1 GN	4/1 GN	5/1 GN	6/1 GN
Length (mm)	475	825	1175	1525	1875	2225
Depth (mm)	660	660	660	660	660	660
Height above worktop (mm)	25	25	25	25	25	25
Depth below worktop (mm)	Bain Marie > 220 Ceran Hotplate > 92	220 92	220 92	220 92	220 92	220 92
Weight (un-crated) (kg)	Bain Marie > 20 Ceran Hotplate > 20	26 36	33 45	40 52	47 61	53 70
Power (kW)	Bain Marie > 0.5 Ceran Hotplate > 0.4	1.0 0.7	1.5 1.1	2.0 1.4	2.5 1.8	3.0 2.1
Electrical supply	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V

* These models have a remote mounted control panel, fitted on a 2m electrical loom, for site fitting by others.

Main Features

DRY HEAT BAIN MARIE:

- Provided with sets of 1/1 GN support collars, excepting combinations of 1/1, 1/2 & 1/3 GN containers up to 150mm deep.
- Optional hotplate inserts & carving inserts available.

CERAN GLASS HOT PLATE:

- Ceran glass hotplate display surface.
- For food presentation in flat bottom oven to tableware dishes.
- ** Allows retractable ceiling mounted heat lamps to be used above the display surface.
- ** Allows bespoke UV bonded glass heated gantries or other bespoke heated gantry types to be used above the display surface.
- Self help or assisted service application.
- 24-hour operation as standard.
- Supplied with remote digital control panel & mounting plate on a 2m electrical loom, for connection to 13 Amp supply.
- Base heat element output is thermostatically controlled, giving even heat spread.

Recommended Use Of The Dry Heat Bain Marie (No Gantry) & Ceran Glass Hotplate (No Gantry) Displays

- If top heat above the display is to be supplied (by others) – the following arrangement is recommended i.e. 300w quartz infra red lamps, 1 per GN section – mounted at 430mm above base surface.
- Retractable ceiling mounted heat lamps should be positioned as described above.
- Depending on food type displayed, a dimmer control for heat lamps may be required.
- If no top heat is provided, all food containers require lids.
- Product display may also require sneeze guard protection (by others) or screens to limit draught.



CONTACT COOL WELL (HT)

Kubus & Designline Drop-ins



Contact Cool Well

CONTACT COOLED:
Perfect to display drinks & food



Contact Cool Well - Static

Available in standard size or bespoke.
Enquire for more details.

Contact Cool Well Main Features

- > 2/3 GN size contact cooled drop in display well with integral refrigeration.
- > Ideal for holding of salads, garnishes and jacket potato toppings.
- > Supplied with 2 no. 1/3 GN x 150mm deep s/steel containers.
- > Supplied with 2 no. 1/3 GN clear polypropylene notched lids – for serving spoons.
- > Cold contact with container bases ensure food core temperatures are maintained.
- > Can achieve temperatures of 0°C to 5°C (max 25°C ambient 55% relative humidity).
- > Features remote digital control panel mounted in fascia plate & 2m loom – for fitting into valance panel.

Food Display Examples

Drinks
Still & carbonated, bottled, canned or carton water, dairy, lemonade, wine, beer, lager, fruit juice & health drinks.

Food
Sandwich fillings, baked potato fillings etc. – stir product regularly.



Bespoke Curved Contact Cool Well Example

Contact Cool Well (HT) R290 Refrigerant

Model	CGDIHT	CGD2HT
Price	£3,922	£4,292
Capacity	1/1 GN	2/1 GN
Length (mm)	450	775
Depth (mm)	660	660
Height above worktop (mm)	25	25
Depth below worktop (mm)	677	677
Weight (uncrated) (kg) (approx.)	45	45
Power (kW)	0.5	0.5
Electrical supply	13A 230V	13A 230V



**Features remote digital control panel mounted in fascia plate & 2m loom – for fitting into valance panel.

* This model has controls fitted to operator side of the mobile unit.

DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk

FROST TOPS (HT)

Kubus & Designline Drop-ins



3/1
Frost Top

FROST TOPS:
Make your counter stand out from the rest

Available in standard size or bespoke.
Enquire for more details.



Bespoke Frost Top Example

Frost Top Main Features

- Available in different sizes with integral refrigeration.
- Available with various solid surfaces.
- Ideal for holding of salads, garnishes and jacket potato toppings.
- Can achieve temperatures of -10°C to -12°C (max 25°C ambient 55% relative humidity).
- Features remote digital control panel mounted in fascia plate & 2m loom – for fitting into valance panel.
- Allows for full displays of products.
- Different styled gantries can be incorporated.

Food Display Examples

Drinks

Still & carbonated, bottled, canned or carton water, dairy, lemonade, wine, beer, lager, fruit juice & health drinks.

Food

Sandwich fillings, baked potato fillings etc. – stir product regularly.



Bespoke Frost Top Example

Frost Top (HT) R290 Refrigerant

Model	FT2	FT3	FT4	FT5	FT6
Price	£4,946	£5,378	£5,694	£6,287	£6,959
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN	6/1 GN
Length (mm)	666	1016	1366	1716	2066
Depth (mm)	641	641	641	641	641
Height above worktop (mm)	N/A	N/A	N/A	N/A	N/A
Depth below worktop (mm)	682	682	682	682	682
Weight (uncrated) (kg)	N/A	N/A	N/A	N/A	N/A
Power (kW)	0.47	0.47	0.47	0.71	0.71
Electrical supply	13A 230V	13A 230V	13A 230V	13A 230V	13A 230V


**Features remote digital control panel mounted in fascia plate & 2m loom – for fitting into valance panel.



ALL BESPOKE:
Prices in table are indicative

AMBIENT MULTI LEVEL GANTRY - SELF HELP

Kubus & Designline Drop-ins

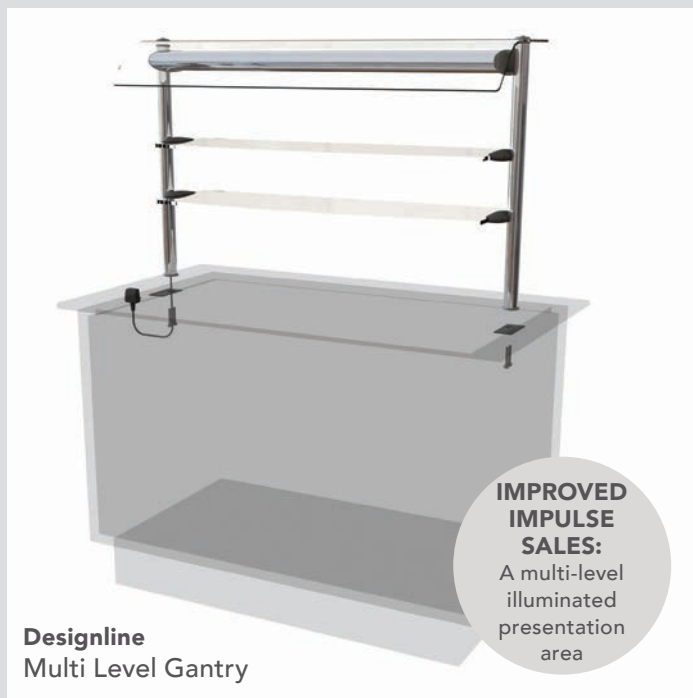

Designline
Multi Level Gantry

**IMPROVED
IMPULSE
SALES:**
A multi-level
illuminated
presentation
area



**Kubus Multi Level
Gantry Shown**



DOWNLOAD ALL
TECHNICAL DRAWINGS
from www.cedfabsltd.co.uk

Available in both Kubus
or Designline model styles



Main Features

- **KUBUS**
Flat glass profile is designed to compliment other units within the Kubus range.
- **DESIGNLINE**
Curved toughened glass sneeze guard profile is designed to compliment other units within the Designline range.
Superstructure supports a toughened curved sneeze protection glass screen.
- Ambient gantry for illumination and sneeze guard protection of shelf & worktop displayed ambient product.
- Superstructure in bright polished steel and aluminium profile.
- Self help application.
- Shelving
Kubus: Unit supplied with two flat toughened glass ambient impulse/ display shelves.
Designline: Unit supplied with two curved toughened glass ambient impulse/ display shelves.
- Illumination
Kubus: Product Illumination is provided

from diffused LED lighting (4000 Kelvin) in a rectangular profile.
Designline: Product Illumination is from diffused LED lighting (4000 Kelvin) in an elliptical profile gantry.

- Lighting is controlled from a rocker switch on gantry end plate.
- Supplied with post fixing plates, bolts, 2 m lead & plug top, for connection to a single 13 Amp socket (13A 230V 50 Hz).

Food Display Examples

Drinks

Still & carbonated, bottled, canned or carton, water, UHT dairy, lemonade, wine, beer, lager, fruit juice & health drinks.

Food

Danish pastries, muffins, doughnuts, fruit cake, biscuits, fruit, chocolate, crackers, rice cakes, tacos, crisps, nuts & breakfast cereals.

* Sandwiches, baguettes, rolls, barm cakes & cheese subject to local health regulations re: display times.



**Designline Multi Level
Gantry Shown**

Ambient Multi Level Gantry

Self Help

Kubus Model	KAMG2	KAMG3	KAMG4	KAMG5
Price	£1,551	£1,722	£1,892	£2,166
Designline Model	AMG2	AMG3	AMG4	-
Price	£1,477	£1,636	£1,798	-
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN
Length (mm)	800	1150	1500	1850
Depth (mm)	Kubus > 474 Designline > 377	474 377	474 377	474 -
Height above worktop (mm)	Kubus > 700 Designline > 695	700 695	700 695	700 -
Weight (uncrated) (kg)	Kubus > 25 Designline > 20	35 30	45 40	45 -
Power (kW)	0.1	0.1	0.1	0.1
Electrical supply	13A 230V	13A 230V	13A 230V	13A 230V



Kubus
Multi Level Gantry

AMBIENT MULTI LEVEL GANTRY - UNDER SHELF LIGHTS

Kubus & Designline Drop-ins



ANGLED DISPLAYS:
Inclined shelving with product stops

Kubus
Multi Level Gantry
(Under shelf lights)



Designline
Multi Level Gantry
(Under shelf lights)



DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk

Available in both Kubus or Designline model styles

Main Features

- **KUBUS**
Flat glass profile is designed to compliment other units within the Kubus range.
- **DESIGNLINE**
Curved toughened glass sneeze guard & side glass profile is designed to compliment other units within the Designline range.
- Ambient gantry for illumination and sneeze guard protection of shelf & worktop displayed ambient product
- Self help ambient confectionery/morning goods display gantry, for counter top installation.
- Superstructure in bright polished steel and aluminium profile.
- Self help application.
- Each shelf fitted with clear acrylic product stop/ point of sale fixing points.
- Shelving
Kubus: Two inclined flat toughened glass

- impulse/ display shelves c/w under shelf lighting.
Designline: Two inclined curved toughened glass impulse/ display shelves c/w under shelf lighting.
- **Illumination**
Kubus: Product Illumination is provided from diffused LED lighting (4000 Kelvin) in a rectangular profile.
Designline: Product Illumination is from diffused LED lighting (4000 Kelvin) in an elliptical profile gantry.
- Lighting is controlled from a rocker switch on gantry end plate.
- Supplied with post fixing plates, bolts, 2 m lead & plug top, for connection to a single 13 Amp socket (13A 230V 50 Hz).

Food Display Examples

- Drinks**
Still & carbonated, bottled, canned or carton, water, UHT dairy, lemonade, wine, beer, lager, fruit juice & health drinks.
- Food**
Danish pastries, muffins, doughnuts, fruit cake, biscuits, fruit, chocolate, crackers, rice cakes, tacos, crisps, nuts & breakfast cereals.
- * Sandwiches, baguettes, rolls, barm cakes & cheese subject to local health regulations re: display times.

Ambient Multi Level Gantry - Under Shelf Lights Self Help


Self Help				
Kubus Model		KMMG2	KMMG3	KMMG4
Price		£2,120	£2,353	£2,551
Designline Model		MMG2	MMG3	MMG4
Price		£2,177	£2,409	£2,619
Capacity		2/1 GN	3/1 GN	4/1 GN
Length (mm)	Kubus >	800	1150	1500
	Designline >	821	1171	1521
Depth (mm)	Kubus >	474	474	474
	Designline >	594	594	594
Height above worktop (mm)	Kubus >	700	700	700
	Designline >	695	695	695
Weight (uncrated) (kg)	Kubus >	35	45	55
	Designline >	30	40	50
Power (kW)		0.1	0.1	0.1
Electrical supply		13A 230V	13A 230V	13A 230V



Designline Multi-Level Gantry Under Shelf Lights Shown

AMBIENT MULTIDECK

Kubus & Designline Drop-ins

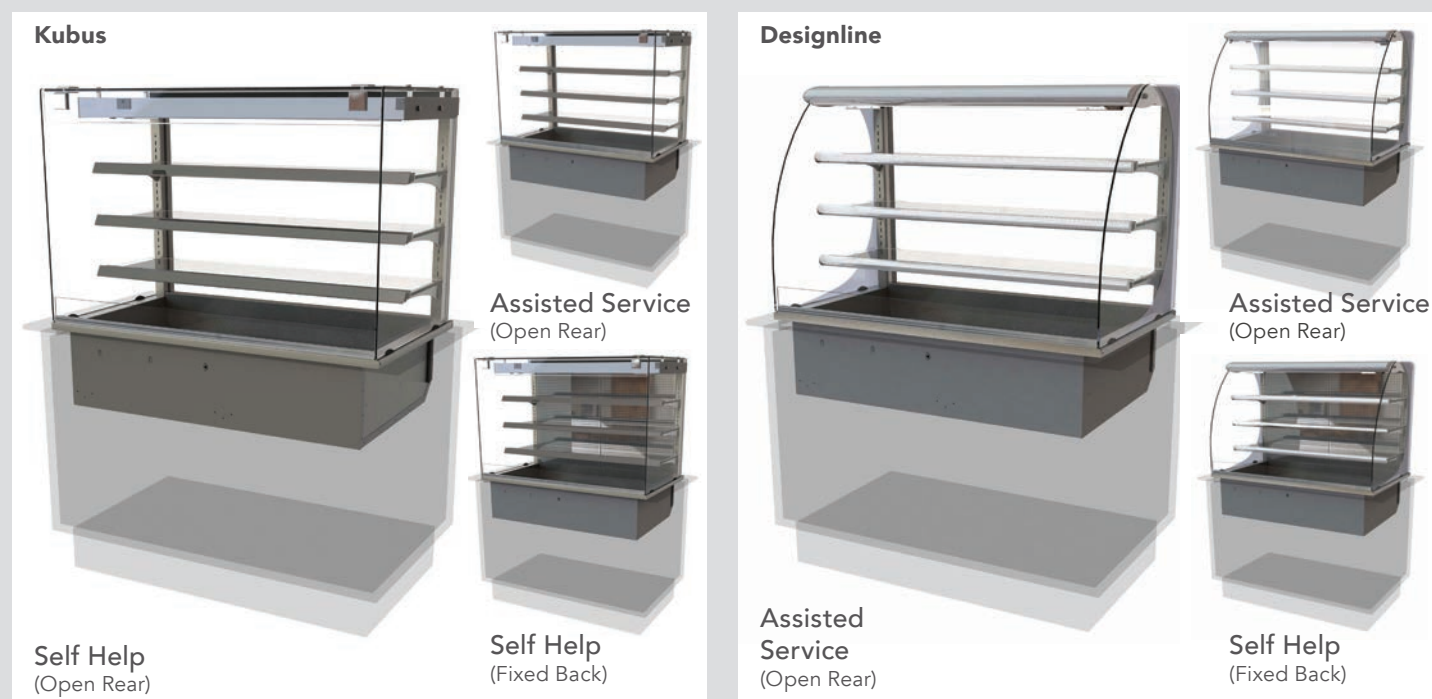

DOWNLOAD ALL
TECHNICAL DRAWINGS
from www.cedfabsltd.co.uk

Available in both Kubus
or Designline model styles



Main Features

- **KUBUS**
Self help: Flat toughened glass sneeze guard and end glass profile.
Assisted Service: Full height flat front & end glass sneeze guard profile.
All three are designed to compliment other units within the Kubus range.
- **DESIGNLINE**
Self Help: Curved toughened end glass profile.
Assisted Service: Full height curved front & end glass sneeze guard profile.
All three are designed to compliment other units within the Designline range.
- Ambient multi deck with storage well & 3 tier glass shelving, for display of wrapped/unwrapped ambient product.
- Superstructure in bright polished steel and aluminium profile.
- Self Help & Assisted Service: Rear loading/open to rear for easier restocking access.
- Fixed Back: Customer side restocking access. Solid steel rear perforated back panel for wall sited application – to match similar chilled multideck display.

- 3 tier toughened glass shelving, adjustable in both height and angle, for increased product display area.
- **Illumination**
Kubus: Product Illumination is provided from diffused LED lighting (4000 Kelvin) in a rectangular profile.
Designline: Product Illumination is from diffused LED lighting (4000 Kelvin) in an elliptical profile gantry.
- Lighting is controlled from a rocker switch on gantry end plate.
- 40mm tall 'Point Of Sale' display/ ticket strips are fitted as standard.
- Modular removable deck plate system for easier cleaning and maintenance.
- Options: Rear door set available (see right).
- Supplied with 2m lead for connection to a single 13 Amp socket (13A 230V 50 Hz).

Food Display Examples

Drinks
Racked wine, impulse drinks (still & carbonated), bottled, canned & cartoned, water, UHT dairy, lemonade, wine, beer, lager, fruit juice & health

drinks, fruit, (basket displayed).

Food
Chocolate, confectionery, crisps, snacks, cakes, flowers, napkins, menus, wine list, table condiment sets, corporate branding, art & craft, souvenirs.

* Sandwiches, baguettes, rolls, barmcakes & cheese subject to local health regulations re: display times.

Rear Doors

Kubus Model	KDR2	KDR3	KDR4
Price	£260	£377	£584
Designline Model	DR2	DR3	DR4
Price	£260	£377	£584
Capacity	2/1 GN	3/1 GN	4/1 GN

Ambient Multideck

Self Help - Open Rear

Kubus Model	KMDA2	KMDA3	KMDA4
Price	£4,239	£4,672	£5,099
Designline Model	MDA2	MDA3	MDA4
Price	£4,098	£4,514	£4,929
Capacity	2/1 GN	3/1 GN	4/1 GN
Length (mm)	825	1175	1525
Depth (mm)	660	660	660
Height above worktop (mm)	265	265	265
Weight	Kubus > 69	111	152
	Designline > 64	106	148
Power (kW)	0.1	0.1	0.1
Electrical supply	13A 230V	13A 230V	13A 230V

Assisted Service - Open Rear

KMDA2AS	KMDA3AS	KMDA4AS	
Price	£4,389	£4,847	£5,235
MDA2AS	MDA3AS	MDA4AS	
Price	£4,245	£4,679	£5,115
Capacity	2/1 GN	3/1 GN	4/1 GN
Length (mm)	825	1175	1525
Depth (mm)	660	660	660
Height above worktop (mm)	265	265	265
Weight	73	117	162
	69	112	156
Power (kW)	0.1	0.1	0.1
Electrical supply	13A 230V	13A 230V	13A 230V

Self Help - Fixed back


KMDA2FB	KMDA3FB	KMDA4FB	
Price	£4,344	£4,841	£5,222
MDA2FB	MDA3FB	MDA4FB	
Price	£4,183	£4,631	£5,026
Capacity	2/1 GN	3/1 GN	4/1 GN
Length (mm)	825	1175	1525
Depth (mm)	660	660	660
Height above worktop (mm)	265	265	265
Weight	75	116	162
	64	106	148
Power (kW)	0.1	0.1	0.1
Electrical supply	13A 230V	13A 230V	13A 230V

* Rear door option available (KDR 2-4) = Kubus, (DR2-4) = Designline.

* Rear door option available (KDR 2-4) = Kubus, (DR2-4) = Designline.

CUTLERY / CONDIMENT UNIT

Kubus & Designline Drop-ins

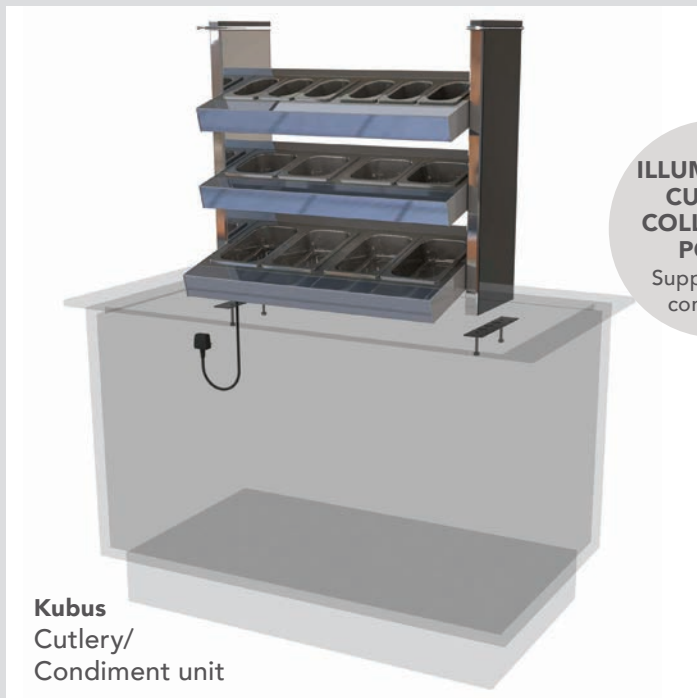

Kubus
Cutlery/
Condiment unit



Designline
Cutlery/Condiment unit

**ILLUMINATED
CUTLERY
COLLECTION
POINT:**
Supplied with
containers



DOWNLOAD ALL
TECHNICAL DRAWINGS
from www.cedfabsltd.co.uk

Available in both Kubus
or Designline model styles



Main Features

- > **KUBUS**
Flat glass profile is designed to compliment other units within the range.
- > **DESIGNLINE**
Curved unit profile is designed to compliment other units within the designline range
- > Worktop mounted cutlery & condiments display with overhead impulse display shelf.
- > Self help application.
- > Superstructure supports 3 levels of elliptical shaped inclined shelving.
- > Features additional eye level toughened glass impulse/ display shelf.
- > Illumination
Kubus: Product Illumination is from diffused LED lighting (4000 Kelvin) under top and mid shelf, for increased visual display.

Designline: Product Illumination is from diffused LED lighting (4000 Kelvin) in the elliptical profile gantry and under top and midshelf, for increased visual display.

- > Unit is supplied with a full compliment of G/N containers for the display of cutlery, condiments, creamers, sachets etc.
- > Lighting is controlled from a rocker switch on bottom shelf end plate.
- > Superstructure in bright polished steel and aluminium profile.
- > Supplied with post fixing plates, bolts, 2 m lead & plug top, for connection to a single 13 Amp socket (13A 230V 50 Hz).

Food Display Examples

3 Tier Gastronorm Shelving
Assorted cutlery, milk, cream, creamers, sugars, sweeteners, butters and spreads, jams,

marmalades, sachet type salt, vinegar, pepper, sauces.

Glass Shelf Area

Fruit, (basket displayed) flowers, napkins, menus, wine lists, table condiment sets, corporate branding.



Designline Condiment Unit Shown



Designline Condiment Unit Shown

Cutlery/ Condiment Unit - Self Help

Self Help

Kubus Model	KCCU1	KCCU2	KCCU3
Price	£1,636	£1,929	£2,153
Designline Model	CCU1	CCU2	CCU3
Price	£1,559	£1,840	£2,046
Capacity	2/1 GN	3/1 GN	4/1 GN
Length	450	800	1150
Depth (mm)	Kubus > 459 Designline > 730	459 730	459 730
Height above worktop (mm)	Kubus > 730 Designline > 708	730 708	730 708
1/9 x 65mm deep Gn containers (top shelf)	3	6	9
1/6 x 65mm deep Gn containers (middle shelf)	2	4	6
1/4 x 65mm deep Gn containers (bottom shelf)	2	4	6
Weight (uncrated) (kg)	Kubus > 19 Designline > 14	27 22	35 30
Power (kW)	0.1	0.1	0.1
Electrical supply	13A 230V	13A 230V	13A 230V

* Light switch located on bottom shelf end plate.

CONFECTIONERY DISPLAY STAND

Kubus & Designline Drop-ins



Kubus
Self Help
KTTCCDS

Available in both Kubus or Designline model styles



Designline
Self Help
TTCCDS



Kubus
Assisted Service
KTTCCDSAS



Designline
Assisted Service
TTCCDSAS



DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk

Common Main Features -

- Freestanding table top impulse unit – for the display of many types of confectionery impulse goods.
- Shelving design provides additional merchandising to worktop below.
- Available as either self help (model KTTCCDS & TTCCDS) or assisted service (model KTTCCDSAS & TTCCDSAS)
- Can be sited at till & cashier points etc.for impulse purchases.

Main Features - Kubus

- Toughened glass and satin finished steel frame, bright polished chrome finish gantry & diffused canopy lighting.
- 2 no. removable inclined display shelves and inclined base shelf in formed steel.
- Each shelf features additional diffused lighting and product stop.
- Toughened glass end panels and magnetically held rear doors.
- Self Help: Open fronted display with

toughened front sneeze screen downstand glass (model KTTCCDS).

- Assisted Service: Keyless locking front glass, for theft prevention (model KTTCCDSAS).
- The counter top display is supported by s/steel levelling feet c/w adjustable nylon surface protection inserts.

Main Features - Designline

- Curved profile matches other displays within the Designline range
- 2 no. removable inclined display shelves in formed acrylic.
- Each shelf features 40mm point of sale strips in bullnose profile clear plastic.
- Display is supported by s/steel feet c/w adjustable nylon surface protection inserts.
- End support panels in screen printed toughened glass 6mm thick.
- 38mm diameter aluminium extruded frame, bright polished chrome finish.
- Each shelf supported on 2 no. 12mm diameter brushed s/steel tubes.

Food Display Examples

Self Help Display Stand (models KTTCCDS & TTCCDS)

Wrapped muffins, cakes, doughnuts, fruit cake, biscuits, chocolate, crisps, nuts, sweets etc.

Assisted Service Display Stand (model KTTCCDSAS & TTCCDSAS)

Unwrapped muffins, cakes, doughnuts, fruit cake, biscuits, chocolate, crisps, nuts, sweets etc.subject to local health regulations re: display times.

Confectionery Display Stand

		Self Help	Assisted
Kubus Model		KTTCCDS	KTTCCDSAS
Price		£1,826	£1,896
Designline Model		TTCCDS	TTCCDSAS
Price		£953	£1,132
Length (mm)	Kubus >	450	450
	Designline >	572	572
Depth (mm)	Kubus >	600	600
	Designline >	499	499
Height above worktop (mm)	Kubus >	730	730
	Designline >	535	10
Weight (uncrated) (kg)	Kubus >	47	47
	Designline >	10	12
Power (kW)	KubusOnly >	0.1	0.1
Electrical supply Only >	Kubus	13A 230V	13A 230V



Designline Model Shown



Kubus Model Shown

DROP-IN DISPLAY ACCESSORIES

Kubus & Designline Drop-ins

AF1 (In/Out Customer Side Airflow)

Non standard airflow in / out customer side

- > Inline fan assisted ducting for removal of heat/ moisture from condensing unit.
- > Suitable for wall sited counters etc.
- > Fitted with 2 metre flexible duct, with bright polished steel air intake & extract grille.

AF2 (In/Out Operator Side Airflow)

Non standard airflow in / out operator side

- > Inline fan assisted ducting for removal of heat/ moisture from condensing unit.
- > Suitable for counters where intake grille is not required on customer side fascia panel.
- > Fitted with 2 metre flexible duct, with bright polished steel air intake & extract grille.



AF1
(customer side)




AF2
(operator side)

Glass Mid Shelf (Cold Well/Cold Island Well)

Main Features

- > **KUBUS**
10mm toughened rectangular glass shelf. Suitable for Kubus cold well (models KCW2-6HT) or Kubus cold island well (models KCIW2-6HT)
- > **DESIGNLINE**
10mm radius fronted glass shelf. Suitable for Designline cold well (models CW2-6HT) or Designline cold island well (models CIW2-6HT)
- > Factory fitted to provide an ambient mid shelf.
- > Provides additional ambient display areas over chilled base.

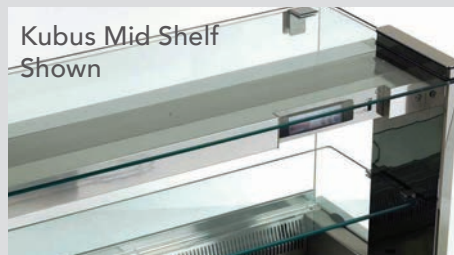

Kubus Mid Shelf
Shown

Kubus Glass Mid Shelf (Cold Well/Cold Island Well)

Kubus	KMS2	KMS3	KMS4	KMS5	KMS6
Price	£334	£350	£384	£488	£517
Capacity	2/1 GN	3/1 GN	4/1GN	5/1 GN	6/1 GN
Length (mm)	692	1042	1392	1742	2092
Width (mm)	335	335	335	335	335
Weight (uncrated) (kg)	6	9	12	15	18

Designline Mid Shelf Shown



Designline Glass Mid Shelf (Cold Well/Cold Island Well)

Designline	MS3	MS4	MS6
Price	£337	£369	£498
Capacity	3/1 GN	4/1GN	6/1 GN
Length (mm)	1015	1365	2065
Width (mm)	335	335	335
Weight (uncrated) (kg)	9	12	18

Cutting Board –

Main Features

- > 350mm long 1/1 Gn flat profile white polyethylene cutting board.
- > For theatre preparation of sandwich fillings etc.
- > Fits individually or in multiples over rear shelf of cold deli (models (K)CDL2-5HT) or cold multi level deli (models (K)CMDL2-5HT)
- > Suitably sized for dishwashers.
- > For use with Kubus cold deli / cold multi level deli drop in display.



Cutting Board

Kubus Model	KCB1
Price	£180
Designline Model	CB1
Price	£180
Length (mm)	350
Width (mm)	250
Weight (uncrated) (kg)	1



Non Standard Airflow Kit (Cold)

Kubus Model	AF1 (Customer Side)	AF2 (Operator Side)
Price	£699	£699
Length (mm)	2000	2000
Width (mm)	150	150
Weight (uncrated) (kg)	0.75	0.75
Power (kW)	+ 0.07	+ 0.07
Electrical supply	See model	See model
Weight (uncrated) (kg)	1	1

Locking Rear Door (Cold/Ambient Multi Deck)



Main Features

- > Lockable rear door set per model
- > Supplied with 2 keys per locking door
- > For use with cold multi deck
- > For use with ambient multi deck - in conjunction with rear door option.

Locking Rear Door (Cold/Ambient Multi Deck)

Kubus	KLDR2	KLDR3	KLDR4	KLDR5
Price	£178	£372	£372	£446
Designline	LDR2	LDR3	LDR4	LDR5
Price	£178	£372	£372	£446
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN




DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk


Hotplate Insert –

Main Features

- > For use with dry heat & wet well bain marie.
- > Converts heated bain marie G/n sections to hotplate operation during varied serving periods.
- > Glass hotplate drop in insert.
- > Hotplate glass surface in lift out steel collar. (Option HINS1)
- > Hotplate glass surface in steel collar with lift up handle.(Option HINS2)**
- > **Version with lift-up handle (HINS2) for easy removal of multiple inserts.
- > For short term holding use.
- > Allows food display in ceramic or oven proof dishes.

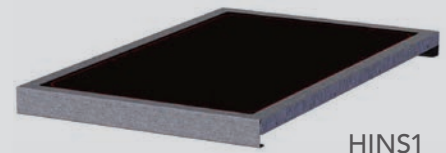

HINS1

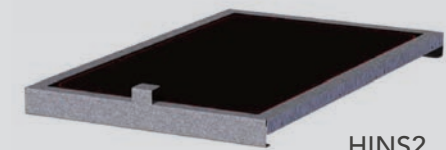

HINS2

Hotplate Insert

Model	HINS1	HINS2
Price	£296	£330
Capacity	1/1 GN	1/1 GN
Width (mm)	347	347
Depth (mm)	546	546
Weight (uncrated) (kg)	5	5

DROP-IN DISPLAY ACCESSORIES CONTINUED



Kubus & Designline Drop-ins

Carvery Insert

Main Features

- > For use with dry heat & wet well bain marie.
- > 1/1Gn spiked drop in carving insert with drain holes.
- > Carving plate features easily removable spiked carving deck.
- > Converts heated bain marie G/n sections to carving operation during varied serving periods.
- > Supplied with 150mm deep removable juice collecting tray, suitably sized for dishwashers.


CINS1

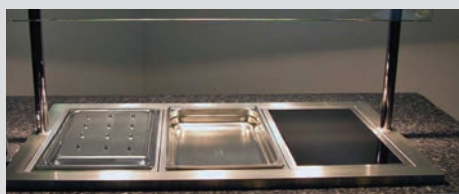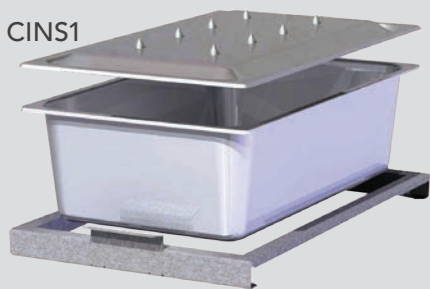

Customer Protection Screen With Posts (Tall)

Main Features



- > 490mm high x 909mm long worktop mounted toughened glass screen & pair of extruded chrome posts.
- > Ideal for customer protection from theatre cooking equipment.
- > Provides sneeze guard protection/ assisted service designation to equipment fitted in the counter worktop.
- > Profile of posts designed to match other models in the Designline range.
- > Supplied with glass support brackets, plastic post collars, fixing bolts & post clamping plates.

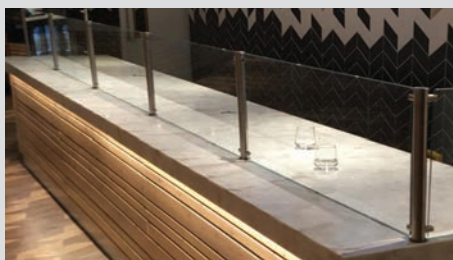

Low Screen Posts

Main Features

- > Ideal for low height (150mm) customer protection from theatre cooking equipment, hot plates and bain maries or assisted service designation.
- > Choice of chrome plated/ extruded aluminum centre (LSCP) or end (LSEP) posts.
- > Posts (only) supplied for bolting through countertop surfaces.
- > Suitable for glass screens up to 10mm thick (glass is optional)
- > Supplied with chrome glass support brackets, collars, M8 worktop fixing bolts & clamping plates.

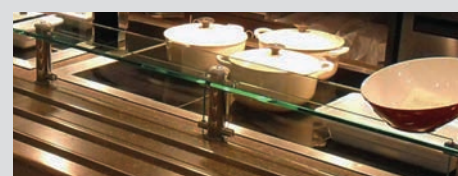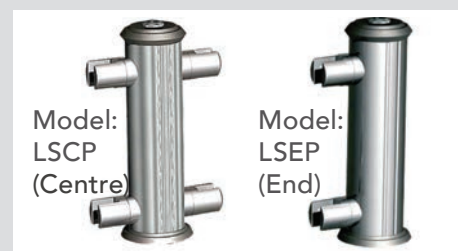

Carvery Insert

Model	CINS1
Price	£242
Capacity	1/1 GN
Width (mm)	347
Depth (mm)	546
Weight (uncrated) (kg)	4

Customer Protection Screen With Posts (Tall)

Model	GS2
Price	£769
Length (mm)	909
Height (mm)	490
Weight (uncrated) (kg)	12

Low Screen Posts


Model	LSCP (Centre Post)	LSEP (End Post)
Price	£258	£224
O/all Length (mm)	89	66
O/all Depth (mm)	49	49
O/all Height (mm)	149	149
Weight (uncrated) (kg)	1	1

* Glass available as option (£ P.O.A.)

Night Blind

Main Features

- > Option suitable for Kubus self help cold multideck with rear doors. (Model KMDR2-5HT)
- > Retractable insulated night blind (energy saving feature).

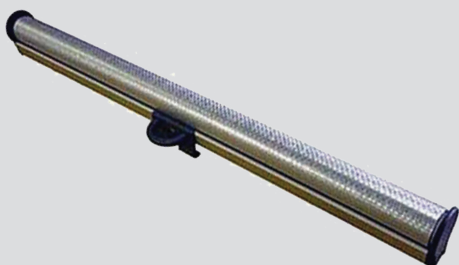

Night Blind

Kubus Model	KNB2	KNB3	KNB4	KNB5
Price	£392	£432	£465	£503
Unit size (G/n)	2/1	3/1	4/1	5/1

*For fixed back models add FB onto end of above codes. Prices are same as above.

Customer Protection Screen Post Only (Soup Station) –

Main Features

- > 315mm high worktop mounted extruded chrome end post, ideal serve over height for soup unit customer protection.
- > Glass screen optional.
- > Profile of posts designed to match other models in the Designline range.
- > Supplied with glass support brackets, plastic post collars, fixing bolts & post clamping plates.
- > Customer Protection Screen-Post Only (Soup Station) – Dimensions



Customer Protection Screen Post Only (Soup Station)

Model	HSCP (Corner Post)	HSEP (End Post)
Price	£289	£260
O/all Length (mm)	89	66
O/all Depth (mm)	49	49
O/all Height (mm)	315	315
Weight (uncrated) (kg)	1	1

* Glass available as option (£ P.O.A.)



DRY HEAT BAIN MARIE

Scenic Food Displays

Scenic
Food Displays



1/1 GN
Self Help



1/1 + 1/3 GN
Self Help



1/1 GN
Assisted Service



1/1 + 1/3 GN
Assisted Service

DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk

Main Features

- Available in 2/1, 3/1, 4/1 & 5/1 Gn length.
- Square Profile (1/1 GN Deep Display Area or 1/1+1/3 Gn Deep Display Area).
- Self Help - Open front with toughened sneeze screen/air retaining screen, top/ side glass.
- Assisted Service - Closed front with tilt hinged full front toughened glass (magnet held), top & side glass.
- Rear S/steel. prep shelf.
- Inclined 2 way mirror glass sliding rear doors c/w finger pulls. Sliding door edge protection.
- Square gantry in s/steel c/w jacketed infra-red lamps.
- 1/1 Gn or 1/1+1/3 Gn pan collars + dividers, to accept 150mm deep Gn containers.
- Digital control panel c/w top heat dimmer control (supplied on loom for mounting in rear valance of counter).

Option Humidity Control

- Upgrade of std. digital control panel to include switched variable humidity control.
- Removable 40mm(h) x 1 lt. manual fill humidity water tray containers (supplied).
- Humidity tray heating source/ kW power supply included in main model.
- Welded steel tank base for accidental water spillage only - not to be used as wet well.
- Factory fit only.

Option Extended Rear Prep Shelf / (Set) Cutting Boards

- Extension to rear shelf in S/Stl. (+150mm to o/ all depth).
- (Set) removable polyethylene cutting boards - white.
- Factory fit only.

Optional Extras

Humidity Control


1/1 GN	SHUMID2	SHUMID3	SHUMID4	SHUMID5
Price	£209	£230	£246	£262
1/1+1/3 GN	SDHUMID2	SDHUMID3	SDHUMID4	SDHUMID5
Price	£230	£282	£288	£298
Capacity	2/1 GN	3/1 GN	4/1GN	5/1 GN
Dimensions	N/A	N/A	N/A	N/A
Weight (Kg)	+0.5	+0.8	+1	+1.3



SHUMID2-5

Extended Prep Shelf / Cutting Boards

1/1 GN & 1/1+1/3 GN	SHRPS2	SHRPS3	SHRPS4	SHRPS5
Price	£114	£187	£219	£239
Capacity	2/1 GN	3/1 GN	4/1GN	5/1 GN
Dimensions	+150(d)	+150(d)	+150(d)	+150(d)
Weight (Kg)	+2	+3	+4	+5

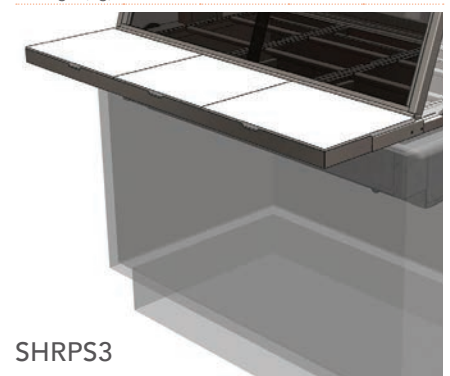

SHRPS3

Dry Heat Bain Marie

1/1 GN Deep Version

Self Help	SHBM2	SHBM3	SHBM4	SHBM5
Price	£5,194	£6,216	£7,475	£8,575
Assisted Service	SHBM2AS	SHBM3AS	SHBM4AS	SHBM5AS
Price	£4,924	£5,973	£7,126	£8,485
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN
Length (mm)	828	1175	1525	1875
Depth (mm)	785	785	785	785
Height above worktop (mm)	560	560	560	560
Depth below worktop (mm)	220	220	220	220
Weight (Uncrated) (kg)	48	58	69	80
Power (kW)	1.6	2.3	2.9	3.6
Electrical supply	13A 230V	13A 230V	13A 230V	16A 230V

1/1+1/3 GN Deep Version

SHDBM2	SHDBM3	SHDBM4	SHDBM5	
Price	£5,553	£6,593	£7,603	£8,984
SHDBM2AS	SHDBM3AS	SHDBM4AS	SHDBM5AS	
Price	£5,277	£6,345	£7,592	£8,895
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN
Length (mm)	825	1175	1525	1875
Depth (mm)	960	960	960	960
Height above worktop (mm)	560	560	560	560
Depth below worktop (mm)	220	220	220	220
Weight (Uncrated) (kg)	60	70	81	92
Power (kW)	1.6	2.3	2.9	3.6
Electrical supply	13A 230V	13A 230V	13A 230V	16A 230V

COLD DELI (HT)

Scenic Food Displays

Scenic

Food Displays



1/1 GN
Self Help



1/1 + 1/3 GN
Self Help



1/1 GN
Assisted Service



1/1 + 1/3 GN
Assisted Service



DOWNLOAD ALL
TECHNICAL DRAWINGS
from www.cedfabsltd.co.uk

Main Features

- Available in 2/1, 3/1, 4/1 & 5/1 Gn length.
- Square Profile (1/1 GN Deep Display Area or 1/1+1/3 Gn Deep Display Area).
- Self Help - Open front with toughened sneeze screen/air retaining screen, top/ side glass.
- Assisted Service - Closed front with tilt hinged full front toughened glass (magnet held), top & side glass.
- Rear S/steel. prep shelf.
- Inclined 2 way mirror glass sliding rear doors c/w finger pulls. Sliding door edge protection.
- Square gantry in s/steel c/w LED lights (4000k).
- Energy efficient, underslung r290 refrigeration unit, auto defrost, auto condensate evap tray.
- Airflow in customer/out operator side c/w s/ steel air inlet/ outlet grilles.
- 1/1 Gn or 1/1+1/3 Gn pan collars + dividers, to

accept 150mm deep Gn containers.

- Gantry mounted digital control panel (operator side).

Option Airflow Kit

- Adjustable 3 speed fan with mounting feet (+0.1Kw/ +1.2kg)
- Flexible duct (between cradle/fan inlet) & (2m duct attached to fan outlet), c/w ventilated s/ steel ducting air outlet grille/spigot.
- Factory fit only.


Option Extended Rear Prep Shelf / (Set) Cutting Boards

- Extension to rear shelf in S/Stl. (+150mm to o/all depth).
- (Set) removable polyethylene cutting boards - white.
- Factory fit only.

Optional Extras

Airflow Kits


1/1 GN & 1/1+1/3 GN	SAF2 (AIRFLOW IN/OUT OPERATOR SIDE)	SAF1 (AIRFLOW IN/OUT CUSTOMER SIDE)
Price	£314	£314
Power (kW)	+0.1	+0.1
Weight (kg)	+1.2	+1.2



SAF2

Extended Prep Shelf / Cutting Boards

1/1 GN & 1/1+1/3 GN	SCRPS2	SCRPS3	SCRPS4	SCRPS5
Price	£114	£187	£219	£239
Capacity	2/1 GN	3/1 GN	4/1GN	5/1 GN
Dimensions	+150(d)	+150(d)	+150(d)	+150(d)
Weight (Kg)	+2	+3	+4	+5

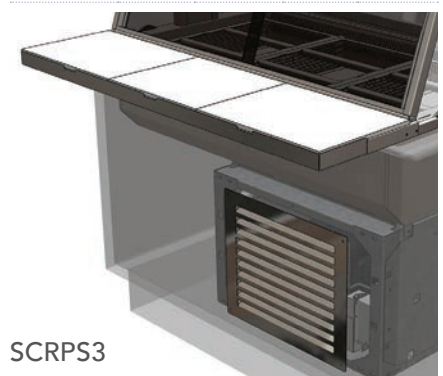

SCRPS3

Cold Deli (HT)

1/1 GN Deep Version

Self Help	SCDL2HT	SCDL3HT	SCDL4HT	SCDL5HT
Price	£7,081	£7,900	£8,908	£10,225
Assisted Service	SCDL2ASHT	SCDL3ASHT	SCDL4ASHT	SCDL5ASHT
Price	£6,770	£7,731	£8,697	£10,003
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN
Length (mm)	828	1175	1525	1875
Depth (mm)	785	785	785	785
Height above worktop (mm)	560	560	560	560
Depth below worktop (mm)	681	681	681	681
Weight (Uncrated) (kg)	115	137	168	201
Power (kW)	1.46	1.46	1.47	1.67
Electrical supply	13A 230V	13A 230V	13A 230V	13A 230V

1/1+1/3 GN Deep Version

SCDDL2HT	SCDDL3HT	SCDDL4HT	SCDDL5HT	
Price	£7,533	£8,338	£9,381	£10,673
SCDDL2ASHT	SCDDL3ASHT	SCDDL4ASHT	SCDDL5ASHT	
Price	£7,058	£8,057	£9,075	£10,537
Capacity	2/1 GN	3/1 GN	4/1 GN	5/1 GN
Length (mm)	825	1175	1525	1875
Depth (mm)	960	960	960	960
Height above worktop (mm)	560	560	560	560
Depth below worktop (mm)	681	681	681	681
Weight (Uncrated) (kg)	1.6	2.4	3.0	4.0
Power (kW)	1.46	1.46	1.47	1.67
Electrical supply	13A 230V	13A 230V	13A 230V	13A 230V

DROP-IN HEATED PATISSERIE

Kubus & Designline Drop-ins



DOWNLOAD ALL
TECHNICAL DRAWINGS
from www.cedfabsltd.co.uk

Available in both Kubus
or Designline model styles



Main Features

- **KUBUS**
Self Help: Flat toughened glass profile.
Assisted Service: Full height flat front & side glass profile. Designed to compliment other units within the Kubus range.
 - **DESIGNLINE**
Self Help: Curved toughened glass profile.
Assisted Service: Full height curved front & side glass profile. Designed to compliment other units within the Designline range.
 - **3 Tier Storage Capacity:** 2 Tier Shelving & Large Base Display Deck. The display features 2 no. heated shelves (adjustable in height) & a large heated display deck below. Each independently controlled zone has removable wire steel deck & shelf grid covers for use with packaged & cartoned heated produce. The display area is finished in food safe polyester powder coated steel.
 - **LED Lighting:** Canopy & shelf lighting in a low energy, high temperature LED fitting with opaque cover, colour 4000k.
 - **Model: Self Help Drop In Hot Patisserie (Rear Doors).** Re-stocking access is by energy efficient, side hinged double glazed rear doors.
- Digital controls are to be mounted on the operator side/rear counter valance panel.
 - **Model: Self Help Drop In Hot Patisserie (Fixed Back).** This heated patisserie is supplied as wall sited with a stainless steel back panel for positioning in an alcove against a wall or back to back, forming a central island grab & go station! The digital controls are to be mounted on the customer side/ front counter valance panel.
 - **Model: Assisted Service Drop In Hot Patisserie (Rear Doors).** Features a full glazed front screen that tilts forward for cleaning. Re-stocking access is through the energy efficient, side hinged double glazed rear doors.
 - **Panoramic Glass Side & Top Panels:** Top glass allows for serve over operation & side glass panels add natural lighting.
 - **System Design:** Static heating maintains food core, whilst convected heat surrounds the food surface. Stainless steel wire grid covers allow heat circulation around packaged good.
 - **Temperature Performance:** Factory set for 70-75°C (+18°C ambient), each display zone is adjustable.
 - **Finishes:** Worktop, rear frame & tank in 430gd

s/steel, toughened glass sides, roof / front screen panels. Display area finished in food grade polyester coated steel, wire steel deck & shelf grid covers.

- **Temperature Controls:** All hot patisseries have 3x digital controllers, controlled by digital air temperature probes. Mains power is controlled by a neon on/off switch. High temperature LED lighting is controlled by neon on/off switch.
- **Power Supply:** Supplied with 3m lead & 13 amp UK plug (13A 230V 50Hz)
- **Low Maintenance:** Easy clean surfaces and durable design ensure low maintenance.
- **Equipment Conformity:** CE & UKCA Certified equipment.

Food Display Examples

Liquid Based Foods (Deck Area):

Cartoned soups, cartoned vegetable soups, porridge etc.

Food (Deck And Shelving Area):

Packaged or wrapped pies, pastries, sausage rolls, stews, curry, chilli dishes, grilled sandwiches, hot baguettes, hot ciabatta, pasta in sauce, ribs with sauce, chicken portions.

Drop-in Heated Patisserie

Self Help (Rear Doors)

Kubus Model	KPH6D	KPH9D	KPH12D
Price	£7,087	£7,363	£7,772
Designline Model	PH6D	PH9D	PH12D
Price	£6,812	£7,087	£7,493
Length (mm)	600	900	1200
Depth (mm)	750	750	750
Height (mm)	Kubus > 843 Designline > 830	843 830	843 830
Weight (uncrated) (kg)	Kubus > 110 Designline > 105	150 145	195 190
Power (kW)	2.04	2.85	2.89
Electrical supply	13A 230V	13A 230V	13A 230V

Assisted Service (Rear Doors)

KPH6ASD	KPH9ASD	KPH12ASD	
Price	£7,153	£7,430	£7,842
PH6ASD	PH9ASD	PH12ASD	
Price	£6,953	£7,220	£7,640
Length (mm)	600	900	1200
Depth (mm)	750	750	750
Height (mm)	843 830	843 830	843 830
Weight (uncrated) (kg)	117 110	157 150	204 196
Power (kW)	2.05	2.85	2.89
Electrical supply	13A 230V	13A 230V	13A 230V

Self Help (Fixed Back)

KPH6FBD	KPH9FBD	KPH12FBD	
Price	£6,948	£7,084	£7,493
PH6FBD	PH9FBD	PH12FBD	
Price	£6,670	£6,814	£7,221
Length (mm)	600	900	1200
Depth (mm)	750	750	750
Height (mm)	843 830	843 830	843 830
Weight (uncrated) (kg)	110 105	150 150	195 196
Power (kW)	2.04	2.85	2.89
Electrical supply	13A 230V	13A 230V	13A 230V

DROP-IN PATISSERIE ACCESSORIES

Kubus & Designline Drop-ins

Night Blind

Night Blind (Factory Fit) (Kubus Models ONLY)


Night Blind	KNB6	KNB9	KNB12	KNB15	KNB18	KNB6FB	KNB9FB	KNB12FB	KNB15FB	KNB18FB
Price	£138	£188	£225	£262	£293	£172	£225	£267	£309	£340
Suitable Model	KPC6HTD	KPC9HTD	KPC12HTD	KPC15HTD	KPC18HTD	KPC6FBHTD	KPC9FBHTD	KPC12FBHTD	KPC15FBHTD	KPC18FBHTD
Dimensions	545x780	845x780	1145x780	1445x780	1745x780	545x780	845x780	1145x780	1445x780	1745x780
Weight (Kg)	0.5	1	1	1.4	1.7	0.5	1	1	1.4	1.7

Insulated pull down night blind, hook fastening, energy saving. Factory Fit.

Airflow Kits

Airflow Kit (In/Out Operator Side)

Model	PAF2
Price	£602
Suitable Models	ALL CHILLED UNITS
Power +(kW)	0.07
Weight +(Kg)	3

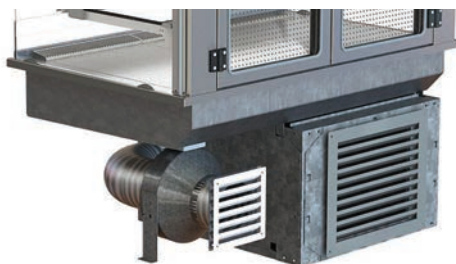

Fan assisted Ø100 metalised flexi venting duct with inline fan, avoids air grills to customer side of counter. Allows airflow venting in/out op. side. Factory fit. Inline fan Ø325.

Airflow Kit (In/Out Customer Side)

Model	PAF1
Price	£602
Suitable Models	ALL CHILLED UNITS
Power +(kW)	0.07
Weight +(Kg)	3



Fan assisted Ø100 metalised flexi venting duct with inline fan that allows both air grills to customer side e.g. island counter / or where rear worktop grille (doors models) or rear worktop grille (fix back models) not suited. Factory fit. Inline fan Ø325.

Gantry Controls to Customer Side

Kubus Gantry Controls (To Customer Side)

Model	KCUSP6	KCUSP9	KCUSP12	KCUSP15	KCUSP18
Price	FOC	FOC	FOC	FOC	FOC
Suitable Model	KPC6HTD	KPC9HTD	KPC12HTD	KPC15HTD	KPC18HTD

Designline Gantry Controls (To Customer Side)

Model	CUSP6	CUSP9	CUSP12	CUSP15	CUSP18
Price	FOC	FOC	FOC	FOC	FOC
Suitable Model	PC6HTD	PC9HTD	PC12HTD	PC15HTD	PC18HTD



Controls to customer side gantry: in lieu of standard operator side position.



Rear Doors for Ambient Drop-in Patisseries

Kubus & Designline Rear Door/s

Model	KDR6	KDR9	KDR12
Price	£414	£414	£833
Suitable Model	KPA6D, KPA6ASD, PA6D & PA6ASD	KPA9D, KPA9ASD, PA9D & PA9ASD	KPA12D, KPA12ASD, PA12D & PA12ASD
Weight +(kg)	3	3	6

Rear Door: Factory fitted double glazed rear door/s is available to the open rear for restocking access, or to enclose to match adjacent cold or hot drop-in patisserie models.



HEATED PATISSERIE

Kubus & Designline Patisseries



DOWNLOAD ALL
TECHNICAL DRAWINGS
from www.cedfabsltd.co.uk

Available in both Kubus
or Designline model styles



Main Features

- **KUBUS**
Self Help: Flat toughened glass profile.
Assisted Service: Full height flat front & side glass profile. Designed to compliment other units within the Kubus range.
- **DESIGNLINE**
Self Help: Curved toughened glass profile.
Assisted Service: Full height curved front & side glass profile. Designed to compliment other units within the Designline range.
- **3 Tier Storage Capacity:** 2 Tier Shelving & Large Base Display Deck. The display features 2 no. heated shelves (adjustable in height) & a large heated display deck below. Each independently controlled zone has removable wire steel deck & shelf grid covers for use with packaged & cartoned heated produce. The display area is finished in food safe polyester coated steel.
- **LED Lighting:** Canopy & shelf lighting in a low energy, high temperature LED fitting with opaque cover, colour 4000k.
- **Model: Self Help Hot Patisserie (Rear Doors).** Re-stocking access is by energy efficient, side hinged double glazed rear doors. Digital controls are mounted on the operator side / rear base panel.
- **Model: Self Help Hot Patisserie (Fixed Back).** This heated patisserie is supplied as wall sited with a stainless steel back panel for positioning in an alcove, against a wall or back to back, forming a central island grab & go station. The digital controls are mounted on the customer side / front base panel.
- **Model: Assisted Service Hot Patisserie (Rear Doors).** Features a full glazed front screen that tilts forward for cleaning. Re-stocking access is through the energy efficient, side hinged glazed rear doors. Digital controls are mounted on the operator side / rear base panel.
- **Panoramic Glass Sides & Top Panels:** Top glass allows for a serve over operation & side glass panels add natural lighting.
- **System Design:** Static heated maintains food core, whilst convected heat surrounds the food surface. Stainless steel wire grid covers allow heat circulation around the packaged food types.
- **Temperature Performance:** Factory set for 70-75°C (+18°C ambient), each display zone is adjustable.

- **Temperature Controls:** The hot patisserie has 3x digital controllers, controlled by digital air temperature probes. Mains power is controlled by neon on/off switch.
- **Finishes:** Base panels finish plastisol steel, colour black (BS 00E53) Worktop & rear frame 430gd s/steel, deck area 304gd st/steel, toughened glass side, roof or front screen panels.
- **Power Supply:** Supplied with 3m lead & 13 amp UK plug (13A 230V 50Hz).
- **Low Maintenance:** Easy, cleanable surfaces and a durable design ensure low maintenance for users.
- **Equipment Conformity:** CE & UKCA Certified equipment.

Food Display Examples

Liquid Based Foods (Deck Area):

Cartoned soups, cartoned vegetable soups, porridge etc.

Food (Deck And Shelving Area):

Packaged or wrapped pies, pastries, sausage rolls, stews, curry, chilli dishes, grilled sandwiches, hot baguettes, hot ciabatta, pasta in sauce, ribs with sauce, chicken portions.

Heated Patisserie

Self Help (Rear Doors)

Kubus Model	KPH6	KPH9	KPH12
Price	£7,362	£7,636	£8,048
Designline Model	PH6	PH9	PH12
Price	£7,086	£7,362	£7,774
Length (mm)	600	900	1200
Depth (mm)	750	750	750
Height (mm)	Kubus > 1423 Designline > 1405	1423 1405	1423 1405
Weight (uncrated) (kg)	Kubus > 120 Designline > 115	165 160	215 210
Power (kW)	2.04	2.85	2.89
Electrical supply	13A 230V	13A 230V	13A 230V

Assisted Service (Rear Doors)

KPH6AS	KPH9AS	KPH12AS	
Price	£7,499	£7,774	£8,185
Price	£7,224	£7,498	£7,910
Length (mm)	600	900	1200
Depth (mm)	750	750	750
Height (mm)	1423	1423	1423
Height (mm)	1405	1405	1405
Weight (uncrated) (kg)	127	172	224
Weight (uncrated) (kg)	120	165	216
Power (kW)	2.05	2.85	2.89
Electrical supply	13A 230V	13A 230V	13A 230V

Self Help (Fixed Back)

KPH6FB	KPH9FB	KPH12FB	
Price	£7,226	£7,362	£7,773
Price	£6,950	£7,086	£7,498
Length (mm)	600	900	1200
Depth (mm)	750	750	750
Height (mm)	1423	1423	1423
Height (mm)	1405	1405	1405
Weight (uncrated) (kg)	120	165	215
Weight (uncrated) (kg)	115	160	210
Power (kW)	2.04	2.85	2.89
Electrical supply	13A 230V	13A 230V	13A 230V

PATISSERIE ACCESSORIES

Kubus & Designline Patisseries

Night Blind

Night Blind (Factory Fit) (Kubus Models ONLY)

Night Blind	KNB6	KNB9	KNB12	KNB15	KNB18	KNB6FB	KNB9FB	KNB12FB	KNB15FB	KNB18FB
Price	£138	£188	£225	£262	£293	£172	£225	£267	£309	£340
Suitable Model	KPC6HT	KPC9HT	KPC12HT	KPC15HT	KPC18HT	KPC6FBHT	KPC9FBHT	KPC12FBHT	KPC15FBHT	KPC18FBHT
Dimensions	545x780	845x780	1145x780	1445x780	1745x780	545x780	845x780	1145x780	1445x780	1745x780
Weight (Kg)	0.5	1	1	1.4	1.7	0.5	1	1	1.4	1.7

Insulated pull down night blind, hook fastening, energy saving. Factory Fit.

Gantry Controls to Customer Side

Kubus Gantry Controls (To Customer Side)


Kubus	KCUSP6	KCUSP9	KCUSP12	KCUSP15	KCUSP18
Price	FOC	FOC	FOC	FOC	FOC
Suitable Model	KPC6HT	KPC9HT	KPC12HT	KPC15HT	KPC18HT



Controls to customer side gantry: in lieu of standard operator side position.

Designline Gantry Controls (To Customer Side)

Designline	CUSP6	CUSP9	CUSP12	CUSP15	CUSP18
Price	FOC	FOC	FOC	FOC	FOC
Suitable Model	PC6HT	PC9HT	PC12HT	PC15HT	PC18HT

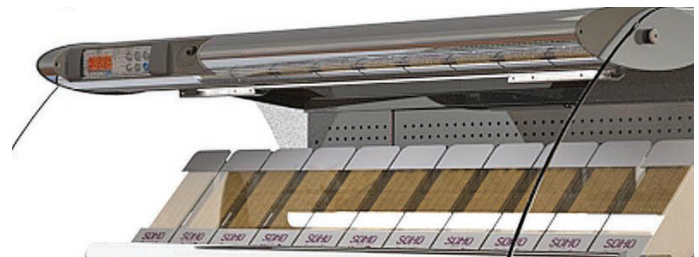

Kick Plinth Set

Kick Plinth (S/Steel Satin Finish - Set)

Cold Units	PKICK6C	PKICK9C	PKICK12C	PKICK15C	PKICK18C
Price	£153	£163	£174	£184	£195
Height (mm)	100	100	100	100	100

Stainless steel kickplinth set of 4. Satin finish, magnet mounted.

Kick Plinth (S/Steel Satin Finish - Set)

Hot / Ambient	PKICK6A	PKICK9A	PKICK12A
Price	£153	£164	£174
Suitable Model	ALL 600 HOT & AMBIENT	ALL 900 HOT & AMBIENT	ALL 1200 HOT & AMBIENT

Stainless Steel Panels

Front Fascia Panel (S/Steel Satin Finish)

Front Panel	KCSF6	KCSF9	KCSF12	KCSF15	KCSF18	KASF6	KASF9	KASF12	KASF15	KASF18	KHSF6	KHSF9	KHSF12
Price	FOC	FOC	FOC	FOC	FOC	FOC	FOC	FOC	FOC	FOC	FOC	FOC	FOC
Suitable Model	KPC6HT KPC6ASHT KPC6FBHT PC6HT PC6ASHT PC6FBHT	KPC9HT KPC9ASHT KPC9FBHT PC9HT PC9ASHT PC9FBHT	KPC12HT KPC12ASHT KPC12FBHT PC12HT PC12ASHT PC12FBHT	KPC15HT KPC15ASHT KPC15FBHT PC15HT PC15ASHT PC15FBHT	KPC18HT KPC18ASHT KPC18FBHT PC18HT PC18ASHT PC18FBHT	KPA6 KPA6AS KPA6FB PA6 PA6AS PA6FB	KPA9 KPA9AS KPA9FB PA9 PA9AS PA9FB	KPA12 KPA12AS KPA12FB PC12HT PC12ASHT PC12FBHT	KPC15HT KPC15ASHT KPC15FBHT PC15HT PC15ASHT PC15FBHT	KPC18HT KPC18ASHT KPC18FBHT PC18HT PC18ASHT PC18FBHT	KPH6 KPH6AS KPH6FB PH6 PH6AS PH6FB	KPH9 KPH9AS KPH9FB PH9 PH9AS PH9FB	KPH12 KPH12AS KPH12FB PH12 PH12AS PH12FB

Stainless steel front fascia panel, (in lieu of std. black front panel). Satin s/steel finish.

Side Panel (S/Steel Satin Finish)

All Models	KSSP
Price	FOC
Suitable Model	ALL MODELS

Stainless steel side panels (in lieu of std. black side panels). Set of 2. Satin s/steel finish.

Rear Doors for Ambient Patisseries

Kubus & Designline Rear Door/s

Rear Door/s	KDR6	KDR9	KDR12
Price	£414	£414	£833
Suitable Model	KPA6, KPA6AS, PA6 & PA6AS	KPA9, KPA9AS PA9 & PA9AS	KPA12, KPA12AS, PA12 & PA12AS
Weight +(kg)	3	3	6

Rear Door: Factory fitted double glazed rear door/s is available to the open rear for restocking access, or to enclose to match adjacent cold or hot drop-in patisserie models.



GLASS DISPLAY KING (HT)

Roll-in Cold Display

GDK



Assisted Service (Front View)



Assisted Service (Rear View)



DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk

Main Features

- > Available in different sizes with integral refrigeration.
- > Roll in chilled drinks & food display deck.
- > For use within servery counter recess as 'fish tank effect' type display.
- > Assisted Service operation.
- > Airflow in/ out to operator side.
- > Chilled steel deck area for worktop level merchandising.
- > Toughened glass chilled storage shelf.
- > Available in 1000 & 1500mm lengths.
- > Glazed roof area viewing panel.
- > Double glazed, hinged rear door/s for easier restocking access.
- > Digital temperature display and control panel (operator side).
- > Chilled by energy efficient hydrocarbon refrigerant.
- > Can achieve temperatures 0-5 deg. C in 27 deg. C ambient at 55% relative humidity.
- > Double glazed front and side glass.

- > Product stops at each display level.
- > Low energy diffused LED lighting.
- > 24 hour operation as standard.
- > Integral condensate water evaporation tray, eliminates the need for site drainage.
- > Mobile positioning/ transportation combined castor/ levelling feet.
- > Optional s/steel or black plastisol fascia panel or powder coating available.
- > Supplied with 2m lead and UK 3 pin plug top, 13A 230V.

Food Display Examples

Drinks

Still & carbonated, bottled, canned or carton water, dairy, lemonade, wine, beer, lager, fruit juice.

Food

Sandwiches, baguettes, rolls, barm cakes, salad, pasta, cheese snacks, cream cakes & pastries, cakes, yoghurt condensate drip tray (float & micro switch).



Glass Display King (HT)

Assisted Service (Rear Doors)

Kubus Model	GDK1000	GDK1500
Price	£7,846	£8,184
Length (mm)	1000	900
Depth (mm)	750	750
Height (mm)	1050	1050
Weight (uncrated)kg	165	200
Power (kW)	1.47	1.47
Electrical supply	13A 230V	13A 230V

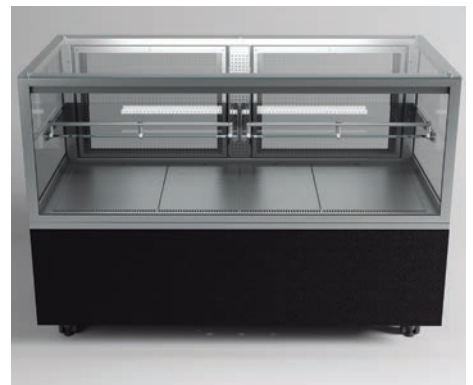


TABLE TOP HEATED MERCHANDISERS

Heated Merchandisers



DOWNLOAD ALL TECHNICAL DRAWINGS from www.cedfabsltd.co.uk



Control panels on wall sited versions are mounted on the front of units.

Main Features

- Table top self help heated merchandiser, open fronted with rear loading to two/one display levels.
- For the display of pre-heated cooked food, unwrapped, packaged or cartoned heated product.
- Open fronted display used as short term food set down For grab 'n' go.
- 2 or 1 no. inclined or straight heated shelves.
- Both upper & lower zones independently controlled.
- Temperature of each heated zone (tier) independently adjusted by digital display & infrared top heat regulator.
- Factory set for 70-75°C (+18°C ambient).
- 430gd s/steel & aluminium in food safe polyester black coating (RAL 9005)
- Mains power to each zone (tier) controlled by separate neon on/off switch.
- Adjustable static base heat maintains food core, variable jacketed, overhead infrared top heat lamps surround food surface.
- Energy saving facility: For less busy serving

periods, upper or lower zones can be independently switched off to conserve energy.

- 2 no. or 1no. s/steel wire shelf grids per shelf, for use with packaged & cartoned heated produce (ea. 553 x 299 mm).
- 5 no. removable steel divider bars per tier allow food to be stored in rows.
- 40 mm (H) ticket strip mount is provided to each shelf front.
- Shelf display dimensions ea. 637 mm (L) x 558 mm (D) x 230 mm (H)
- 2 Tier: Supplied with 2m lead & 13 amp UK plug (13A 230V 50Hz) 2.85 kW.
- 1 Tier: Supplied with 2m lead & 13 amp UK plug (13A 230V 50Hz) 1.33 kW.
- Easy, cleanable surfaces and a durable design ensure low maintenance for users.
- CE & UKCA Certified equipment.
- 'C' profile safety edge to all exposed edge glass.
- Toughened glass side panels provide panoramic product display, offer environmental side draught protection & add natural lighting.

Options

Powder Coating			
All models	DCOL2		
Price	£236		
Graphics Header Panel			
All models	DBH2		
Price	£68		
Vinyl Label			
All models	DVG2		
Price	£68 (MOQ 10 UNITS)		
Rear Doors			
2 Tier Angled	DGDR2	2 Tier Straight	DGSR2
Price	£776	Price	£776
1 Tier Angled	DGDR2S	1 Tier Straight	DGDRS2S
Price	£776	Price	£776
Wall Sited Doors			
2 Tier Angled	DGDR2W	2 Tier Straight	DGSR2W
Price	£776	Price	£776
1 Tier Angled	DGDR2SW	1 Tier Straight	DGDRS2SW
Price	£776	Price	£776

Table Top Heated Merchandisers

2 Tier		2 Tier Wall Sited		1 Tier		1 Tier Wall Sited	
Incline Shelf	DTTHM2	Incline Shelf	DTTHM2W	Incline Shelf	DTTHM2S	Incline Shelf	DTTHM2SW
Price	£5,659	Price	£5,659	Price	£4,533	Price	£4,533
Straight Shelf	DTTHMS2	Straight Shelf	DTTHMS2W	Straight Shelf	DTTHMS2S	Straight Shelf	DTTHMS2SW
Price	£5,659	Price	£5,659	Price	£4,533	Price	£4,533
Length (mm)	763	Length (mm)	763	Length (mm)	763	Length (mm)	763
Depth (mm)	Incline > 715 Straight > 726	Depth (mm)	Incline > 715 Straight > 726	Depth (mm)	Incline > 715 Straight > 726	Depth (mm)	Incline > 715 Straight > 726
Height (mm)	Incline > 771 Straight > 792	Height (mm)	Incline > 771 Straight > 792	Height (mm)	Incline > 480 Straight > 500	Height (mm)	Incline > 480 Straight > 500
Power (kW)	2.85	Power (kW)	2.85	Power (kW)	1.33	Power (kW)	1.33
Electrical supply	13A 230V	Electrical supply	13A 230V	Electrical supply	13A 230V	Electrical supply	13A 230V



Head Office
Lancashire



CED Fabrications Ltd
Units A1-A4, Falcon Court
Clayton Business Park
Clayton-le-Moors,
Hyndburn, Lancashire
BB5 5JD

T: 01254 238 282
F: 01254 238 228

T: 0151 545 2840

CED Fabrications Ltd,
Units 4 & 5,
Nexus Industrial Estate,
Randles Road, Knowsley
Prescot, Merseyside
L34 9HX



Manufacturing Plant
Merseyside



Manufacturing Plant
Kent



CED Fabrications Ltd
Building 3
Sandwich Industrial Estate
Sandwich, Kent
CT13 9LY

T: 01304 617 377



Certificate Number 7895
ISO 9001, ISO 14001

SALES LINE
01254 238 282

All prices exclude VAT - Free delivery applies to all orders over £350. All orders under £350 incur a £40 charge. Deliveries to UK mainland ONLY.



DOWNLOAD ALL
TECHNICAL DRAWINGS
from www.cedfabsltd.co.uk

Distributor stamp

w: www.cedfabsltd.co.uk
e: sales@cedlimited.com